
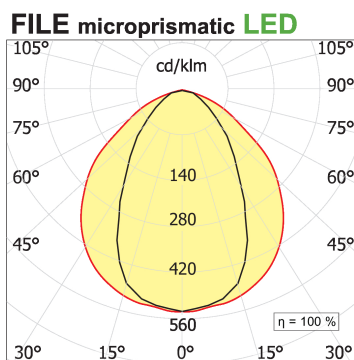


File Recessed

code F1001.830XD/01

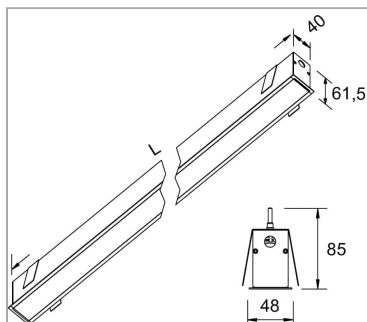

PRODUCT DESCRIPTION

Direct light indoor recessed lamp made of extruded aluminum 6060; complete with led; color rendering index CRI >90. Professional led modules assembled and wired on extruded aluminum heatsink with high performance reflector, equipped with harmonic steel springs for installation in the profile Tools free; wiring through 5 cables with quick coupling terminal blocks; protocol Dimmable Dali. Lamp with color finish white; Microprismatic diffuser in polycarbonate with diffusing film. Degree of protection IP40/IP43.

Microprismatic diffuser, with controlled luminance compliant with EN12464-1

PRODUCT SPECS

Installation method	Recessed with frame
Absorbed power	19,2 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Microprismatic diffuser
Finishing	White
Luminous flux of the product	2976 lm
Luminous efficiency	155 lm/W
MacAdam color tolerance	3
Durata media stimata	50000h Ta 25° L70B10
Power supply/transformer	Included
Protocol	Dimmable Dali
Energy efficiency class	E
Weight	1.30 Kg
Dimension	860 mm
Hole size	squared cut 42xL+2 mm
IP Grade	Inst. Parete Ip40 / Inst. Soffitto Ip43
Protection Class	Class I appliance
plasterboard thickness	min. 9 mm - max. 15 mm

WEB PAGE



ASSEMBLY INSTRUCTIONS



