
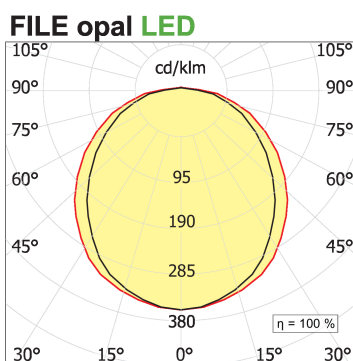


## File Recessed

code F1002.840PD/01

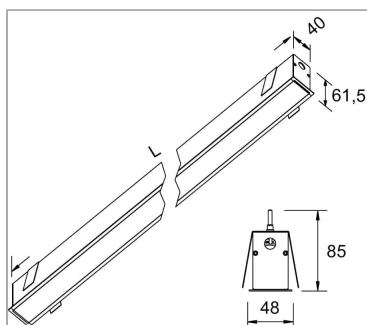

## PRODUCT DESCRIPTION

Direct light indoor recessed lamp made of extruded aluminum 6060; complete with led; color rendering index CRI >90. Professional led 25.6 W modules assembled and wired on extruded aluminum heatsink with high performance reflector, equipped with harmonic steel springs for installation in the profile Tools free; wiring through 5 cables with quick coupling terminal blocks; protocol Dimmable Dali. Lamp with color finish white; in polycarbonate with diffusing film. Degree of protection IP40/IP43.

## PRODUCT SPECS

|                              |                                         |
|------------------------------|-----------------------------------------|
| Installation method          | Recessed with frame                     |
| Light source                 | LED                                     |
| Absorbed power               | 25,6 W                                  |
| Color temperature            | 4000K                                   |
| Color rendering index CRI    | >90                                     |
| Optic                        | Opal polycarbonate diffuser             |
| Finishing                    | White                                   |
| Luminous flux of the product | 1485 lm                                 |
| Luminous efficiency          | 58 lm/W                                 |
| MacAdam color tolerance      | 3                                       |
| Life time estimate           | 50000h Ta 25° L80B10                    |
| Protocol                     | Dimmable Dali                           |
| Energy efficiency class      | E                                       |
| Weight                       | 1.70 Kg                                 |
| Dimension                    | L1140 mm                                |
| Hole size                    | 42xL+2 mm                               |
| IP Grade                     | Inst. Parete Ip40 / Inst. Soffitto Ip43 |
| Power supply                 | 220-240V 50-60Hz                        |

## WEB PAGE



## ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 2

