
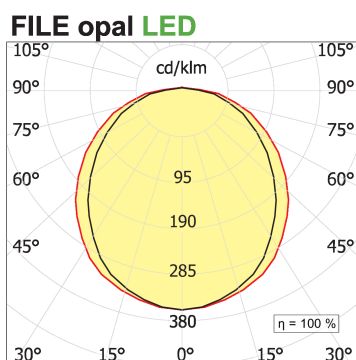


File ceiling

code F1200.827PD/01

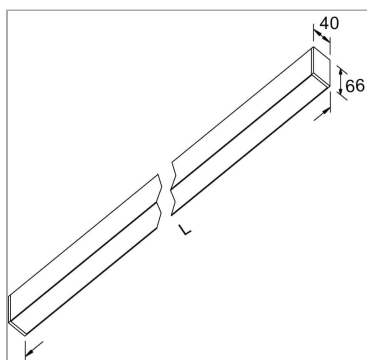

PRODUCT DESCRIPTION

Direct light indoor ceiling lamp made of extruded aluminum 6060, complete with led; color rendering index CRI >90. Professional led 12.8 W modules assembled and wired on extruded aluminum heatsink with high performance reflector, equipped with harmonic steel springs for installation in the profile Tools free; wiring through 5 cables with quick coupling terminal blocks; protocol Dimmable Dali / Touch & Dimm. Lamp with color finish white; in polycarbonate with diffusing film. Degree of protection IP40/IP43.

PRODUCT SPECS

| | |
|------------------------------|------------------------------|
| Installation method | Ceiling surface mounted |
| Light source | LED |
| Absorbed power | 12,8 W |
| Color temperature | 2700K |
| Color rendering index CRI | >90 |
| Optic | Opal polycarbonate diffuser |
| Finishing | White |
| Luminous flux of the product | 721 lm |
| Luminous efficiency | 56 lm/W |
| MacAdam color tolerance | 3 |
| Life time estimate | 50000h Ta 25° L80 B10 |
| Protocol | Dimmable Dali / Touch & Dimm |
| Energy efficiency class | E |
| Weight | 1.06 Kg |
| Dimension | L580 mm |
| IP Grade | IP40 |
| Power supply | 220-240V 50-60Hz |

WEB PAGE



ASSEMBLY INSTRUCTIONS

