
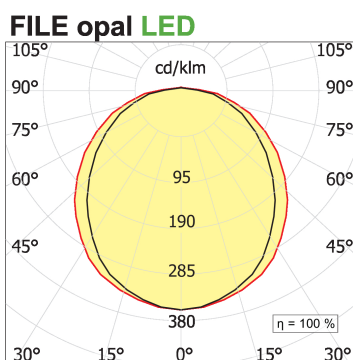


File ceiling

code F1206.840P/01

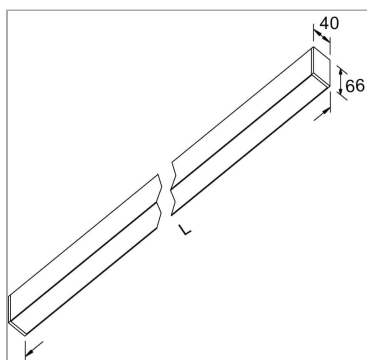

PRODUCT DESCRIPTION

Direct light indoor ceiling lamp made of extruded aluminum 6060, complete with led; color rendering index CRI >90. Professional led 51.2 W modules assembled and wired on extruded aluminum heatsink with high performance reflector, equipped with harmonic steel springs for installation in the profile Tools free; wiring through 5 cables with quick coupling terminal blocks; protocol On/Off. Lamp with color finish white; in polycarbonate with diffusing film. Degree of protection IP40/IP43.

PRODUCT SPECS

| | |
|------------------------------|-----------------------------|
| Installation method | Ceiling surface mounted |
| Light source | LED |
| Absorbed power | 51,2 W |
| Color temperature | 4000K |
| Color rendering index CRI | >90 |
| Optic | Opal polycarbonate diffuser |
| Finishing | White |
| Luminous flux of the product | 2970 lm |
| Luminous efficiency | 58 lm/W |
| MacAdam color tolerance | 3 |
| Life time estimate | 50000h Ta 25° L80B10 |
| Protocol | On/Off |
| Energy efficiency class | E |
| Dimension | L2265 mm |
| IP Grade | IP40 |
| Power supply | 220-240V 50-60Hz |

WEB PAGE



ASSEMBLY INSTRUCTIONS

