



## File Wall

code F1404.8TWP/01

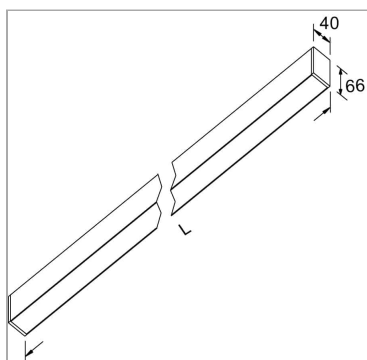

### FILE opal LED

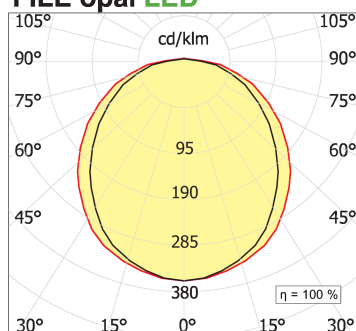

### PRODUCT DESCRIPTION

Direct light indoor wall lamp made of extruded aluminum 6060, complete with led; color rendering index CRI >90. Professional led 38.4 W modules assembled and wired on extruded aluminum heatsink with high performance reflector, equipped with harmonic steel springs for installation in the profile Tools free; wiring through 5 cables with quick coupling terminal blocks; protocol On/Off; polycarbonate with diffusing film. Protection rating IP40/IP43.

### PRODUCT SPECS

|                           |                             |
|---------------------------|-----------------------------|
| Installation method       | Wall surface mounted        |
| Light source              | LED                         |
| Absorbed power            | 38,4 W                      |
| Color temperature         | Tunable White               |
| Color rendering index CRI | >90                         |
| Optic                     | Opal polycarbonate diffuser |
| Finishing                 | White                       |
| MacAdam color tolerance   | 3                           |
| Life time estimate        | 50000h Ta 25° L80B10        |
| Protocol                  | On/Off                      |
| Energy efficiency class   | D                           |
| Weight                    | 2.7 Kg                      |
| Dimension                 | L1700 mm                    |
| IP Grade                  | IP40                        |
| Power supply              | 220-240V 50-60Hz            |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

