
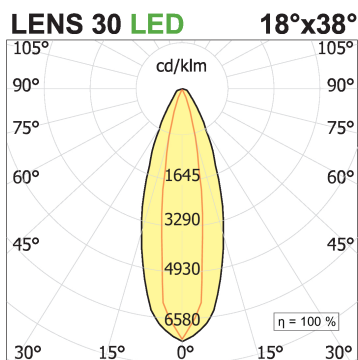


## Faretèn focus 42S for File system

code FR041.940Z/01

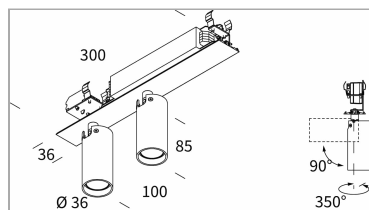

### PRODUCT DESCRIPTION

Modular system for direct, diffused and/or accent lighting, consisting of hollow profiles made from 66x40 mm painted or anodised extruded aluminium, with a predefined length or cut to measure, available in the following versions: wall-mounted, ceiling-mounted, suspended, recessed with a super-slim edge trim, just 5 mm wide (61.5 x 40 mm) and trimless recessed. To be integrated with LED linear light sources, battens for T16 fluorescent lamps, projectors with built-in LED source and max 16A 3-circuit track modules for inclusion of projectors. Fluorescent battens, complete with 50/60 Hz 230/240 V electronic power supply, LED batten driver included. To be completed with side end caps with Light Proof system, opal white or microprismatic PC diffusing screen (in accordance with EN 12464-1), closing profiles, with a predefined length or cut to measure, or dark-light aluminium grille with high specular qualities and mounting brackets or suspension cables. IP40 protection rating.

### PRODUCT SPECS

Installation method	system
Light source	Led
Absorbed power	2x8 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Asymmetric
Finishing	White
Luminaire luminous flux	1700 lm
Luminous efficiency	106 lm/W
MacAdam color tolerance	3
Power supply/transformer	Included
Protocol	On/Off
Energy efficiency class	D
Weight	0.70 Kg
Dimension	L300Wx38Hx85 Ø36 mm
IP Grade	IP20
Protection Class	Class I appliance

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

