
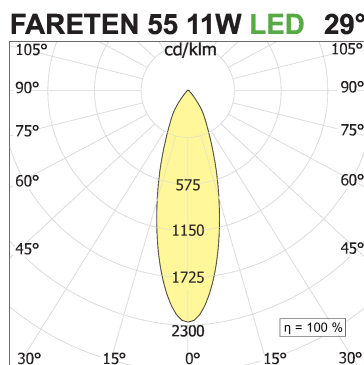
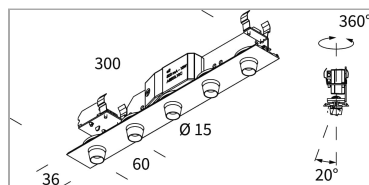


Faretèn Minispot S for File system

code FR023.930FD/01

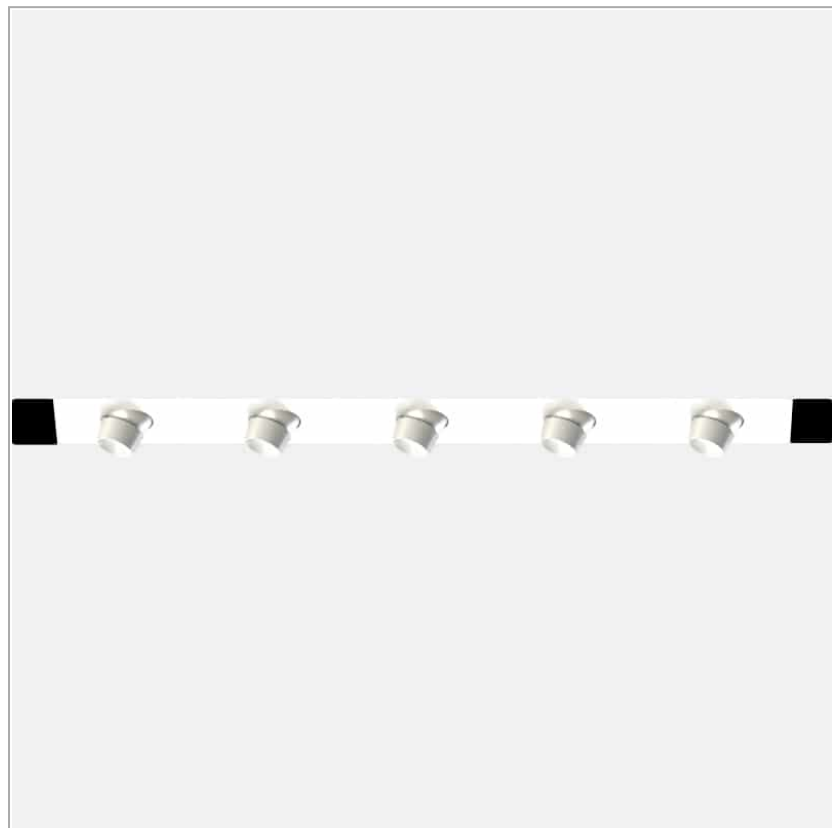

PRODUCT DESCRIPTION

Super compact accent lighting. Projectors programme featured by very contained dimensions, for use both in aluminum profiles, to mix accent with diffused lighting, and surface-mounted. The range articulates in two fixture types: spherical LED spot, adjustable on both vertical and horizontal axis, housed inside a five-units module, complete with driver and cylindrical LED projector, of 36 and 50 mm. diameter, adjustable on both vertical and horizontal axis, housed inside a one-or two-units module.

PRODUCT SPECS

Installation method	system
Absorbed power	5x1,5 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Flood 28°
Finishing	White
Luminaire luminous flux	600 lm
Luminous efficiency	80 lm/W
Power supply/transformer	Included
Protocol	Dimmable
Energy efficiency class	E
Weight	0.40 Kg
Dimension	L300Wx38 Ø15 mm
IP Grade	IP20

WEB PAGE



ASSEMBLY INSTRUCTIONS

