
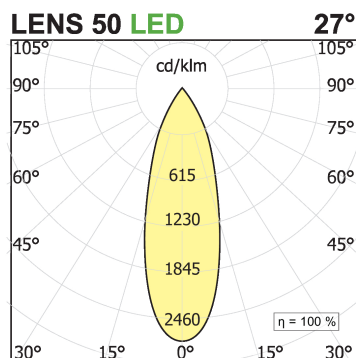
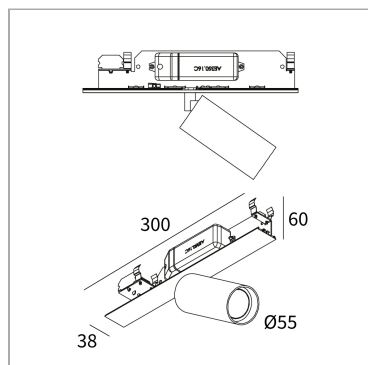


## Faretèn focus 55S, for File system

code FR043.930FD/01

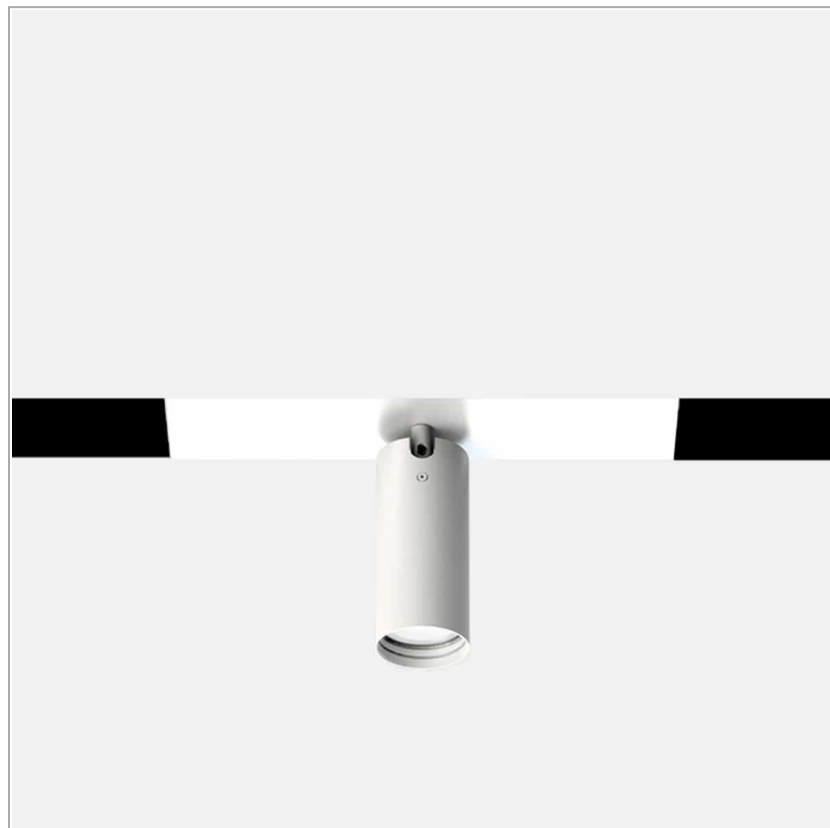

### PRODUCT DESCRIPTION

Modular system for direct, diffused and/or accent lighting, consisting of hollow profiles made from 66x40 mm painted or anodised extruded aluminium, with a predefined length or cut to measure, available in the following versions: wall-mounted, ceiling-mounted, suspended, recessed with a super-slim edge trim, just 5 mm wide (61.5 x 40 mm) and trimless recessed. To be integrated with LED linear light sources, battens for T16 fluorescent lamps, projectors with built-in LED source and max 16A 3-circuit track modules for inclusion of projectors. Fluorescent battens, complete with 50/60 Hz 230/240 V electronic power supply, LED batten driver included. To be completed with side end caps with Light Proof system, opal white or microprismatic PC diffusing screen (in accordance with EN 12464-1), closing profiles, with a predefined length or cut to measure, or dark-light aluminium grille with high specular qualities and mounting brackets or suspension cables. IP40 protection rating.

### PRODUCT SPECS

|                           |                       |
|---------------------------|-----------------------|
| Installation method       | system                |
| Light source              | Led                   |
| Absorbed power            | 18 W                  |
| Color temperature         | 3000K                 |
| Color rendering index CRI | >90                   |
| Optic                     | Flood                 |
| Finishing                 | White                 |
| Luminaire luminous flux   | 1650 lm               |
| Luminous efficiency       | 92 lm/W               |
| MacAdam color tolerance   | 2                     |
| Durata media stimata      | 50000h Ta 25° L70B10  |
| Power supply/transformer  | Included              |
| Protocol                  | Dimmable              |
| Energy efficiency class   | E                     |
| Weight                    | 0.63 Kg               |
| Dimension                 | L300Wx300Hx115 Ø55 mm |
| IP Grade                  | IP20                  |
| Protection Class          | Class I appliance     |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## OPTIONAL ACCESSORIES

### Accessori Lens With Ring Asymmetric lens with ring ø55



code L055A.A

uncategorized. White finishing  
Warning: Not suitable with halogen lamp

Technical Sheet



code L055A.A

uncategorized. Black finishing  
Warning: Not suitable with halogen lamp

Technical Sheet



### Accessori Lens With Ring Elipsoid lens with ring ø55



code L055E.A

uncategorized. White finishing  
Warning: Not suitable with halogen lamp

Technical Sheet



code L055E.A

uncategorized. Black finishing  
Warning: Not suitable with halogen lamp

Technical Sheet



### Accessori Lens With Ring Honeycomb louver with ring ø55




code L055R.A

uncategorized. White finishing

Technical Sheet





code L055R.A

uncategorized. Black finishing

Technical Sheet



## Accessori Lens With Ring Satin lens with rings ø55



code L055S.A

uncategorized. White finishing

Warning: Not suitable with halogen lamp

Technical Sheet



code L055S.A

uncategorized. Black finishing

Warning: Not suitable with halogen lamp

Technical Sheet

