




Faretèn focus 55S, for File system

code FR043.940FD/01

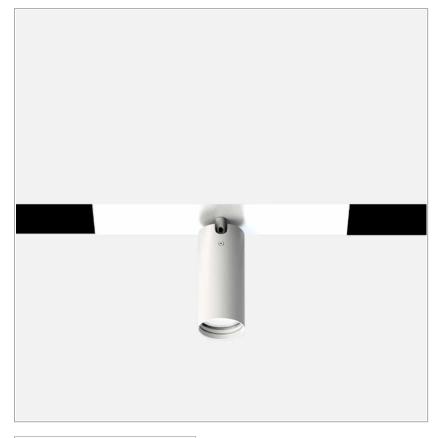







PRODUCT DESCRIPTION

Modular system for direct, diffused and/or accent lighting, consisting of hollow profiles made from 66x40 mm painted or anodised extruded aluminium, with a predefined length or cut to measure, available in the following versions: wallmounted, ceiling-mounted, suspended ,recessed with a super-slim edge trim, just 5 mm wide (61.5 x 40 mm) and trimless recessed. To be integrated with LED linear light sources, battens for T16 fluorescent lamps, projectors with built-in LED source and max 16A 3-circuit track modules for inclusion of projectors. Fluorescent battens, complete with 50/60 Hz 230/240 V electronic power supply, LED batten driver included. To be completed with side end caps with Light Proof system, opal white or microprismatic PC diffusing screen (in accordance with EN 12464-1), closing profiles, with a predefined length or cut to measure, or darklight aluminium grille with high specular qualities and mounting brackets or suspension cables. IP40 protection rating.

PRODUCT SPECS

Installation method	system
Absorbed power	18 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Flood
Finishing	White
Luminaire luminous flux	1750 lm
Luminous efficiency	97 lm/W
MacAdam color tolerance	2
Durata media stimata	50000h Ta 25° L70B10
Power supply/transformer	Included
Protocol	Dimmable
Energy efficiency class	E
Weight	0.63 Kg
Dimension	L300Wx300Hx115 Ø55 mm
IP Grade	IP20
Protection Class	Class I appliance

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres. Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified. We reserve the right to make changes to our products at any time. Page 1 / 3

LUCIFERO'S SRL with sole shareholder - via del Tappezziere, 3 - 40138 Bologna - Italy - +39 051 6014276 - assistenza@luciferos.it - customercare@luciferos.it

OPTIONAL ACCESSORIES

Accessori Lens With Ring Asymmetric lens with ring ø55



code L055A.A

uncategorized. White finishing Warning: Not suitable with halogen lamp



code L055A.A

uncategorized. Black finishing Warning: Not suitable with halogen lamp

Accessori Lens With Ring Elipsoid lens with ring ø55

0

code L055E.A


uncategorized. White finishing Warning: Not suitable with halogen lamp



code L055E.A

uncategorized. Black finishing Warning: Not suitable with halogen lamp

Accessori Lens With Ring Honeycomb louver with ring ø55



code L055R.A

uncategorized. White finishing



Technical Sheet



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres. Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified. We reserve the right to make changes to our products at any time. Page 2 / 3









Technical Sheet



Technical Sheet

code L055R.A



uncategorized. Black finishing





Accessori Lens With Ring Satin lens with rings ø55

code L055S.A



uncategorized. White finishing Warning: Not suitable with halogen lamp



code L055S.A

uncategorized. Black finishing Warning: Not suitable with halogen lamp



Technical Sheet



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres. Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified. We reserve the right to make changes to our products at any time.