# File 2 suspension 24W/m

code F2308.827X/01

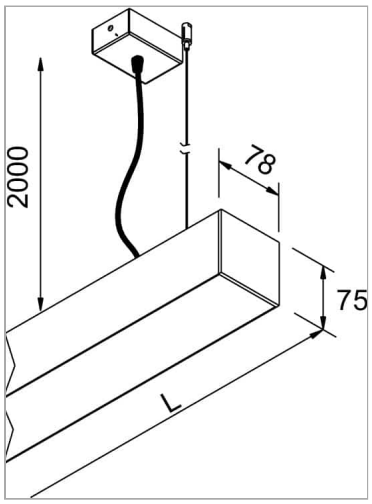


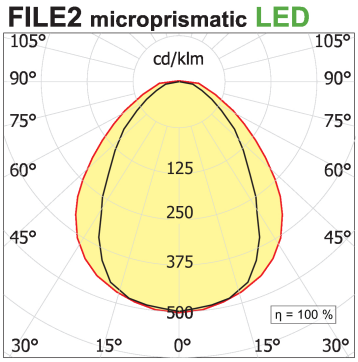


## PRODUCT DESCRIPTION

Direct light indoor suspension lamp made of extruded aluminum 6060; complete with led; color rendering index CRI >90. Professional led modules assembled and wired on extruded aluminum heatsink with high performance reflector, equipped with harmonic steel springs for installation in the profile Tools free, wiring through 5 cables with quick-release terminal blocks, protocol On/Off. Lamp with color finish white, in polycarbonate with diffusing film. Degree of protection IP40/IP43.

## PRODUCT SPECS

| | |
|---|---|
| Installation method | Suspension |
| Light source | LED |
| Absorbed power | 64 W |
| Color temperature | 2700K |
| Color rendering index CRI | >90 |
| Optic | Microprismatic diffuser |
| Finishing | White |
| Luminous flux of the product | 5109 lm |
| Luminous efficiency | 80 lm/W |
| MacAdam color tolerance | 3 |
| Life time estimate | 50000h Ta 25° L80B10 |
| Protocol | On/Off |
| Energy efficiency class | E |
| Dimension | L2825 mm |
| IP Grade | Inst. Parete Ip40 / Inst. Soffitto Ip43 |
| Power supply | 220-240V 50-60Hz |

## WEB PAGE

## ASSEMBLY INSTRUCTIONS

Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.
We reserve the right to make changes to our products at any time.



**LUCIFERO'S SRL with sole shareholder - via del Tappezziere, 3 - 40138 Bologna - Italy -** +39 051 6014276 - assistenza@luciferos.it - customercare@luciferos.it

**LUCIFERO'S SRL with sole shareholder - via del Tappezziere, 3 - 40138 Bologna - Italy -** +39 051 6014276 - assistenza@luciferos.it - customercare@luciferos.it