

## File 2 Trimless Recessed LED

code F2102.8HCX/01




### PRODUCT DESCRIPTION


Lamp with direct light from built-in shaved; color rendering CRI >90. Professional led modules assembled and wired on extruded aluminum heatsink with high performance reflector; equipped with springs in harmonic steel for installation in the profile Tools free; wiring through 5 cables with quick coupling terminal blocks; protocol On/Off. Lamp with colour finish white; . Degree of protection IP40/IP43.

### PRODUCT SPECS

|                           |                                         |
|---------------------------|-----------------------------------------|
| Installation method       | Trimless recessed                       |
| Light source              | LED                                     |
| Absorbed power            | 25,6 W                                  |
| Color temperature         | Horticulture                            |
| Color rendering index CRI | >90                                     |
| Optic                     | Microprismatic diffuser                 |
| Finishing                 | White                                   |
| MacAdam color tolerance   | 3                                       |
| Life time estimate        | 50000h Ta 25° L80B10                    |
| Protocol                  | On/Off                                  |
| Energy efficiency class   | E                                       |
| Dimension                 | L1140 mm                                |
| Hole size                 | 82xL+2 mm                               |
| IP Grade                  | Inst. Parete Ip40 / Inst. Soffitto Ip43 |
| Power supply              | 220-240V 50-60Hz                        |

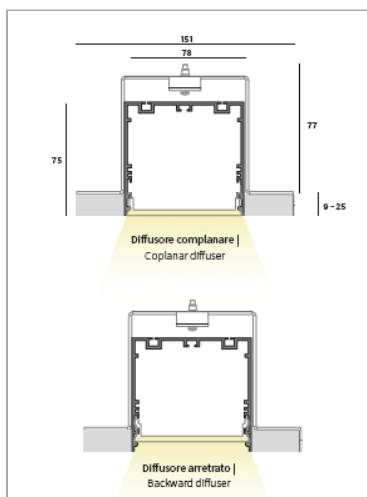

### FILE2 microprismatic LED

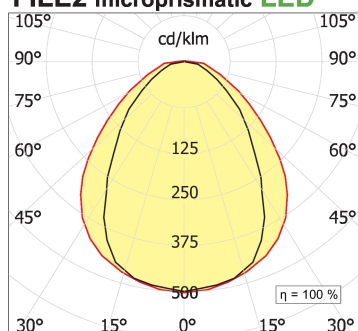

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

