

## File 2 Trimless Recessed LED

code F2107.830X/01




### PRODUCT DESCRIPTION


Lamp with direct light from built-in shaved; color rendering CRI >90. Professional led modules assembled and wired on extruded aluminum heatsink with high performance reflector; equipped with springs in harmonic steel for installation in the profile Tools free; wiring through 5 cables with quick coupling terminal blocks; protocol On/Off. Lamp with colour finish white; . Degree of protection IP40/IP43.

### PRODUCT SPECS

|                              |                                         |
|------------------------------|-----------------------------------------|
| Installation method          | Trimless recessed                       |
| Light source                 | LED                                     |
| Absorbed power               | 57,6 W                                  |
| Color temperature            | 3000K                                   |
| Color rendering index CRI    | >90                                     |
| Optic                        | Microprismatic diffuser                 |
| Finishing                    | White                                   |
| Luminous flux of the product | 4598 lm                                 |
| Luminous efficiency          | 80 lm/W                                 |
| MacAdam color tolerance      | 3                                       |
| Life time estimate           | 50000h Ta 25° L80B10                    |
| Protocol                     | On/Off                                  |
| Energy efficiency class      | E                                       |
| Dimension                    | L2545 mm                                |
| Hole size                    | 82xL+2 mm                               |
| IP Grade                     | Inst. Parete Ip40 / Inst. Soffitto Ip43 |
| Power supply                 | 220-240V 50-60Hz                        |

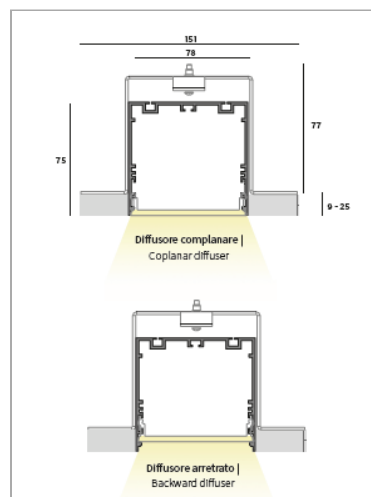

### FILE2 microprismatic LED

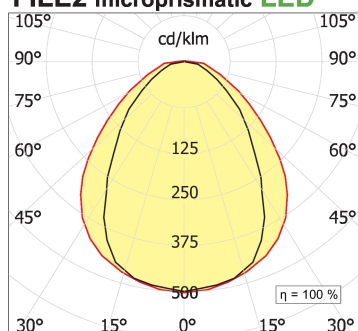

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

