

## File 2 trimless recessed 32W/m

code F2136.930X/01




### PRODUCT DESCRIPTION


Lamp with direct light from built-in shaved; color rendering CRI >90. Professional led modules assembled and wired on extruded aluminum heatsink with high performance reflector; equipped with springs in harmonic steel for installation in the profile Tools free; wiring through 5 cables with quick coupling terminal blocks; protocol On/Off. Lamp with colour finish white; . Degree of protection IP40/IP43.

### PRODUCT SPECS

Installation method	Trimless recessed
Light source	linear LED 32W/mt CRI90
Absorbed power	72 W
Color temperature	3000K
Color rendering index CRI	90
Optic	Microprismatic diffuser
Finishing	White
Luminous flux of the product	5754 lm
Luminous efficiency	80 lm/W
Protocol	On/Off
Energy efficiency class	D
Dimension	W2265 mm
Hole size	82XL+2 mm
IP Grade	Inst. Parete Ip40 / Inst. Soffitto Ip43
Power supply	220-240V 50-60Hz

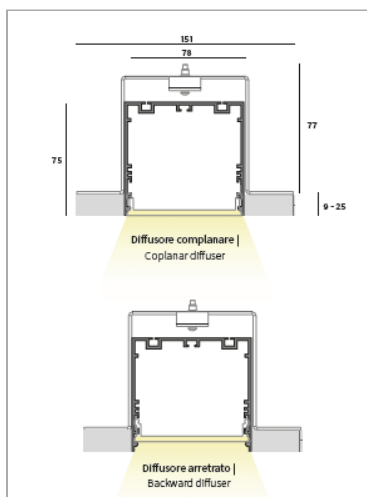

### FILE2 microprismatic LED

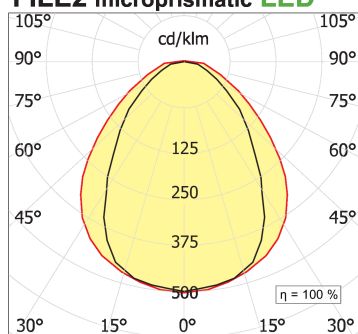

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

