
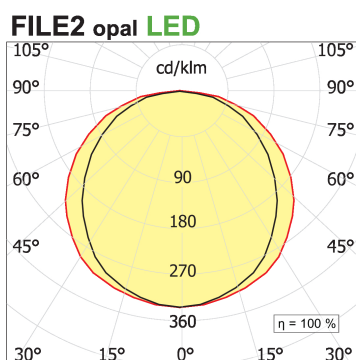


## File 2 Wall

code F2401.840PD/01

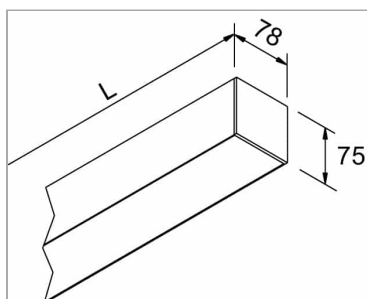

### PRODUCT DESCRIPTION

Direct light indoor wall lamp made of extruded aluminium 6060, complete with LEDs; colour rendering index CRI >90. Professional led modules 19.2 W 4000°K assembled and wired on extruded aluminium heat sink with high performance reflector, equipped with harmonic steel springs for installation in Tools free profile; protocol Dimmable Dali. Lamp with white colour finish; made of polycarbonate with diffusing film. Protection class IP40/IP43.

### PRODUCT SPECS

Installation method	Wall surface mounted
Light source	LED
Absorbed power	19,2 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Opal polycarbonate diffuser
Finishing	White
Luminous flux of the product	1412 lm
Luminous efficiency	74 lm/W
MacAdam color tolerance	3
Life time estimate	50000h Ta 25° L80B10
Protocol	Dimmable Dali
Energy efficiency class	E
Dimension	L860 mm
IP Grade	Inst. Parete Ip40 / Inst. Soffitto Ip43
Power supply	220-240V 50-60Hz

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



