
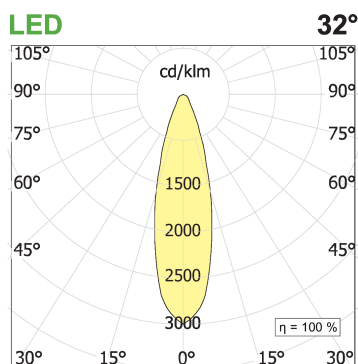
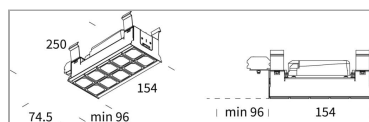


## Leva 5+5, module for File 2 system

code LV141.935FD/01

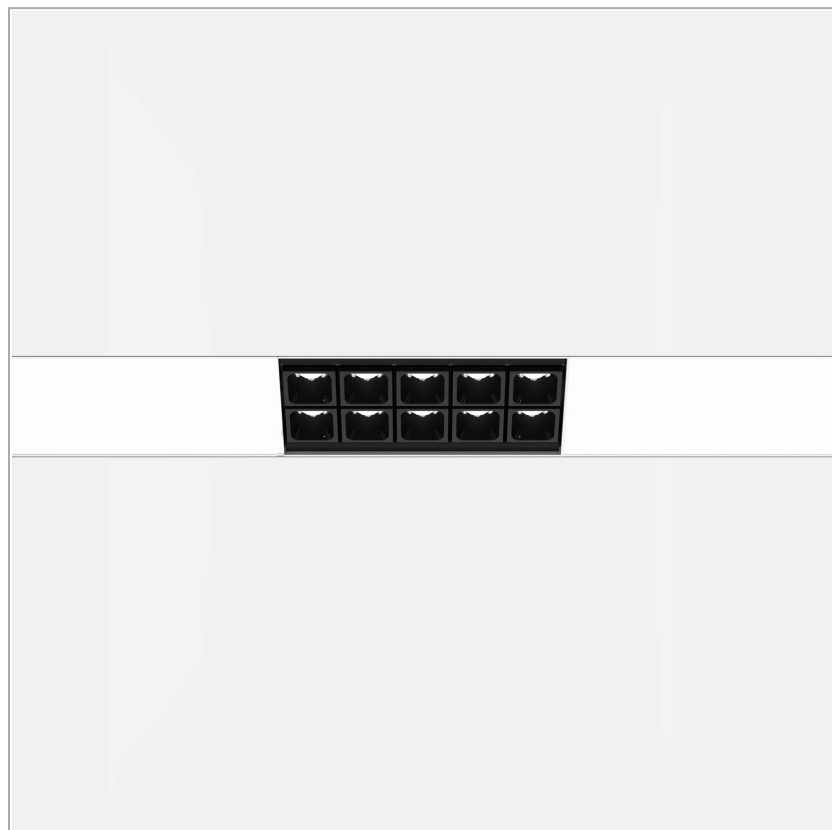

### PRODUCT DESCRIPTION

Modular system for direct, diffused and/or accent lighting, consisting of hollow profiles made from 75x78 mm painted or anodised extruded aluminium, with a predefined length or cut to measure, available in the following versions: wall-mounted, ceiling-mounted, suspended, recessed with a super-slim edge trim, just 5 mm wide, and trimless, fully-retracting flush recessed. To be integrated with LED linear light sources, battens for T16 and T16 seamless fluorescent lamps, recessed versions with built-in LED source or for QPAR16 halogen/LED lamps and max 16A 3-circuit track modules for inclusion of projectors. Fluorescent battens, complete with 50/60 Hz 230/240 V electronic power supply, LED batten driver included. To be completed with side end caps with Light Proof system, opal white or microprismatic PC diffusing screen (in accordance with EN 12464-1), closing profiles, with a predefined length or cut to measure, or darklight aluminium grille with high specular qualities and mounting brackets or suspension cables. IP20/IP40 protection rating.

### PRODUCT SPECS

Installation method	system
Light source	LED
Absorbed power	10x2,2 W
Color temperature	3500K
Color rendering index CRI	>90
Optic	Flood
Finishing	White box - black optic
Luminous flux of the product	2360 lm
Luminous efficiency	107 lm/W
MacAdam color tolerance	2
Life time estimate	50000h Ta 25° L90B10
Protocol	Dimmable Dali
Energy efficiency class	E
Dimension	L250xW74.5 mm
IP Grade	IP20
Power supply	220-240V 50-60Hz

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



