


## Leva 5+5, module for File 2 system

code LV141.930FD/01

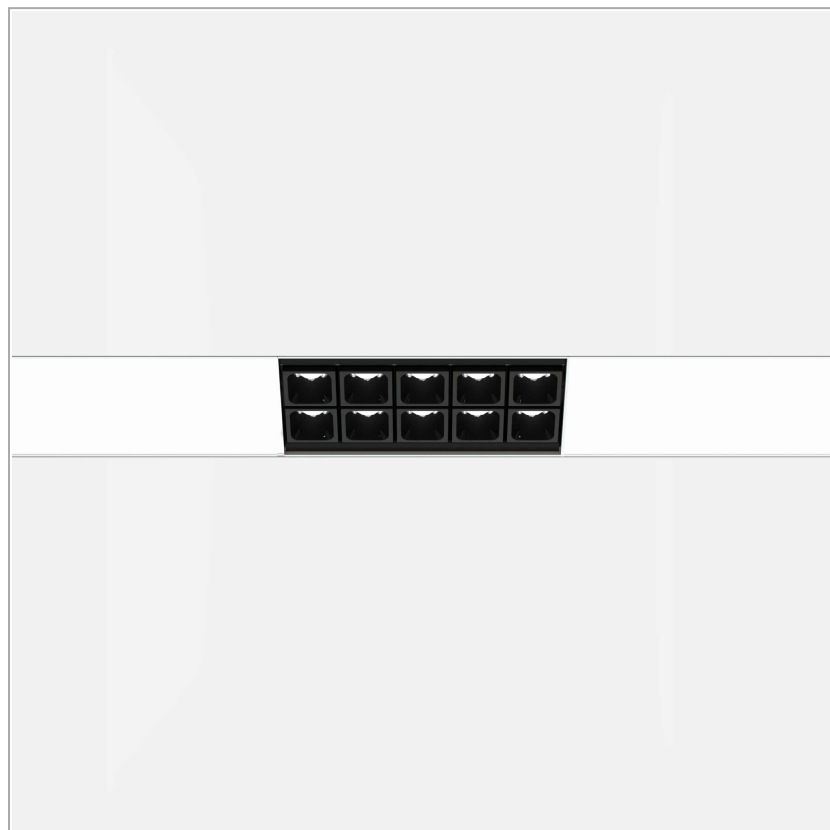

### PRODUCT DESCRIPTION

Modular system for direct, diffused and/or accent lighting, consisting of hollow profiles made from 75x78 mm painted or anodised extruded aluminium, with a predefined length or cut to measure, available in the following versions: wall-mounted, ceiling-mounted, suspended, recessed with a super-slim edge trim, just 5 mm wide, and trimless, fully-retracting flush recessed. To be integrated with LED linear light sources, battens for T16 and T16 seamless fluorescent lamps, recessed versions with built-in LED source or for QPAR16 halogen/LED lamps and max 16A 3-circuit track modules for inclusion of projectors. Fluorescent battens, complete with 50/60 Hz 230/240 V electronic power supply, LED batten driver included. To be completed with side end caps with Light Proof system, opal white or microprismatic PC diffusing screen (in accordance with EN 12464-1), closing profiles, with a predefined length or cut to measure, or darklight aluminium grille with high specular qualities and mounting brackets or suspension cables. IP20/IP40 protection rating.

### PRODUCT SPECS

|                              |                         |
|------------------------------|-------------------------|
| Installation method          | system                  |
| Light source                 | LED                     |
| Absorbed power               | 10x2,2 W                |
| Color temperature            | 3000K                   |
| Color rendering index CRI    | >90                     |
| Optic                        | Flood 32°               |
| Finishing                    | White box - black optic |
| Luminous flux of the product | 2170 lm                 |
| Luminous efficiency          | 99 lm/W                 |
| MacAdam color tolerance      | 2                       |
| Life time estimate           | 50000h Ta 25° L90B10    |
| Protocol                     | Dimmable Dali           |
| Energy efficiency class      | E                       |
| Dimension                    | L250xW74.5 mm           |
| IP Grade                     | IP20                    |
| Power supply                 | 220-240V 50-60Hz        |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



