

## File 2 Outdoor recessed 32W/m

code F2051.930XD/01



### PRODUCT DESCRIPTION


Recessed direct light lamp; CRI >90 colour rendering. Professional led modules assembled and wired on extruded aluminum heatsink with high performance reflector; equipped with springs in harmonic steel for installation in the profile Tools free; wiring through 5 cables with quick coupling terminal blocks; protocol Dimmable Dali. Lamp with color finish white; . Degree of protection IP54.

### PRODUCT SPECS

|                              |                         |
|------------------------------|-------------------------|
| Installation method          | Recessed with frame     |
| Light source                 | linear LED 32W/mt CRI90 |
| Absorbed power               | 27 W                    |
| Color temperature            | 3000K                   |
| Color rendering index CRI    | 90                      |
| Optic                        | Microprismatic diffuser |
| Finishing                    | White                   |
| Luminous flux of the product | 2158 lm                 |
| Luminous efficiency          | 80 lm/W                 |
| Protocol                     | Dimmable Dali           |
| Energy efficiency class      | D                       |
| Weight                       | 2.50 Kg                 |
| Dimension                    | L860 mm                 |
| Hole size                    | 80xL+2 mm               |
| IP Grade                     | IP54                    |
| Power supply                 | 220-240V 50-60Hz        |



### FILE2 microprismatic LED

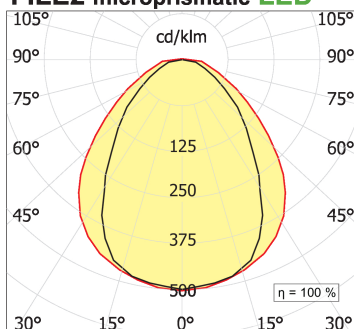

### WEB PAGE



## OPTIONAL ACCESSORIES

### Couple of closure heads 78 mm

code LT2890.1



Modular system for direct, diffused and/or accent lighting, consisting of hollow profiles made from 75x78 mm painted or anodised extruded aluminium, with a predefined length or cut to measure, available in the following versions: wall-mounted, ceiling-mounted, suspended, recessed with a super-slim edge trim, just 5 mm wide, and trimless, fully-retracting flush recessed. To be integrated with LED linear light sources, battens for T16 and T16 seamless fluorescent lamps, recessed versions with built-in LED source or for QPAR16 halogen/LED lamps and max 16A 3-circuit track modules for inclusion of projectors. Fluorescent battens, complete with 50/60 Hz 230/240 V electronic power supply, LED batten driver included. To be completed with side end caps with Light Proof system, opal white or microprismatic PC diffusing screen (in accordance with EN 12464-1), closing profiles, with a predefined length or cut to measure, or darklight aluminium grille with high specular qualities and mounting brackets or suspension cables. IP20/IP40 protection rating.

Technical Sheet



### File 2 System Single bracket to fix the lighting modules

code LT2891

order 2 Brackets For proFile



Technical Sheet

