
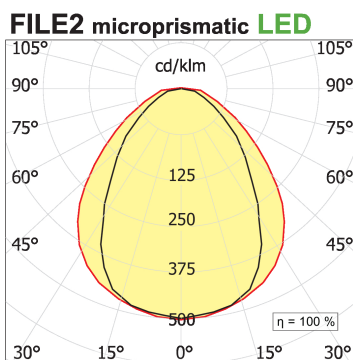


## File 2 Ceiling Ip54 LED A/F

code F2258.930X/01

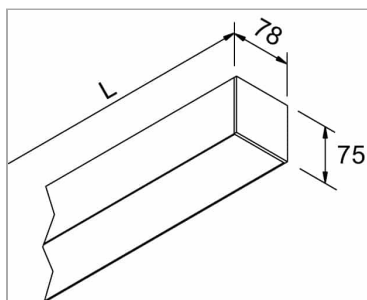

### PRODUCT DESCRIPTION

Ceiling luminaire IP54 outdoor, direct and diffused light. Body in extruded aluminum 6060, head in die-cast aluminum light proof, led SMD professional 32W/mt color temperature 3000K, assembled on rigid pcb with spray coating treatment for moisture protection, mounted and wired on ARS1 anodized aluminum extruded heatsink with additional transparent palsun protection to prevent contact to the LEDs during installation or maintenance, quick installation tools free by means of Click system with double-click harmonic steel springs for a first clamping to the profile that allows the wiring to the electrical network, Microprismatic diffuser to quick coupling without using screws. Integrated electronic power supply.

Microprismatic diffuser, with controlled luminance compliant with EN12464-1

### PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	linear LED 32W/mt CRI90
Absorbed power	90 W
Color temperature	3000K
Color rendering index CRI	90
Optic	Microprismatic diffuser
Finishing	White
Luminous flux of the product	7192 lm
Luminous efficiency	80 lm/W
Power supply/transformer	Included
Protocol	On/Off
Energy efficiency class	D
Dimension	L2825 mm
IP Grade	IP54

### WEB PAGE

