


File 2 track 32W/m

code F2533.940XD/01

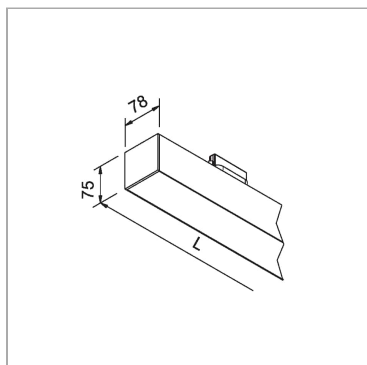

PRODUCT DESCRIPTION

Direct light indoor track lamp made of extruded aluminum 6060; complete with LED; color rendering index CRI>90. Protocol Dimmable Dali; lamp with colour finish white; in polycarbonate with diffusing film. Protection rating IP40/IP43. Can be installabile on most tracks 3 phases in trade the product in white and oxised silver mount a white track adapter. The product in black, oxised inox, moka mount a black track adapter. For connection to theOne Track (A.A.G. Stucchi) or Global Track pulse (Nordic Aluminium).

PRODUCT SPECS

| | |
|------------------------------|---|
| Installation method | Track |
| Light source | linear LED 32W/mt CRI90 |
| Absorbed power | 45 W |
| Color temperature | 4000K |
| Color rendering index CRI | 90 |
| Optic | Microprismatic diffuser |
| Finishing | White |
| Luminous flux of the product | 3704 lm |
| Luminous efficiency | 82 lm/W |
| Protocol | Dimmable Dali |
| Energy efficiency class | D |
| Dimension | W1420 mm |
| IP Grade | Inst. Parete Ip40 / Inst. Soffitto Ip43 |
| Power supply | 220-240V 50-60Hz |

WEB PAGE



ASSEMBLY INSTRUCTIONS

