

Minifile wall with opal diffuser

code ML404.840D/01




PRODUCT DESCRIPTION

Wall-mounted luminaire for interiors with direct or indirect mono-directional light, diffused with LED source; equipped with a 62mmx32mm extruded aluminium structure, an opal polycarbonate screen and aluminium side caps in finish. degree of protection IP40. Protection class I.

PRODUCT SPECS

Installation method	Wall surface mounted
Light source	LED
Absorbed power	38,4 W
Color temperature	4000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	2229 lm
Luminous efficiency	58 lm/W
MacAdam color tolerance	3
Life time estimate	50000h Ta 25° L80B10
Protocol	Dimmable Dali
Energy efficiency class	D
Dimension	L1700 mm
IP Grade	IP40
Power supply	220-240V 50-60Hz

MINIFILE opal LED

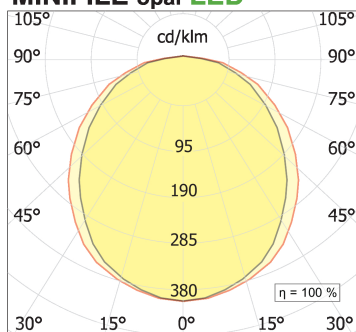

WEB PAGE



ASSEMBLY INSTRUCTIONS

