

## Minifile Ceiling LED 3000K

code ML205.827D/01




### PRODUCT DESCRIPTION

ceiling lamp LED with opaline diffuser

### PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	Led-en
Absorbed power	44,8 W
Color temperature	2700K
Color rendering index CRI	>90
Finishing	Bianco
Luminous flux of the product	2524 lm
Luminous efficiency	56 lm/W
MacAdam color tolerance	3
Durata media stimata	50000h Ta 25° L70B10
Power supply/transformer	Included
Protocol	Dimmable Dali
Energy efficiency class	D
Dimension	L1985 mm
IP Grade	IP40
Protection Class	Class I appliance

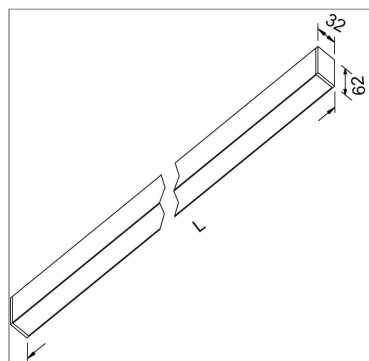

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## OPTIONAL ACCESSORIES

### Accessori Wallbox Couple of closure heads for wallbox MINIFILE

code LTM200.1



Modular system for direct, diffused, accent or wallwasher, made of 62x32 mm painted or anodised extruded aluminium empty profiles, available in predefined lengths or cut to measure. Available in wall-mounted, ceiling-mounted, suspended, trimless recessed or recessed with super-slim 5 mm. width edge trim versions. To be integrated with linear LED sources, LED spotlights, complete with 50/60 Hz 230/240 V electronic power supply. To be completed with Light Proof system side end caps, opal white polycarbonate diffusing screen, quick mounting extruded aluminium shapers (for linear LEDs and spotlight LEDs) or closing profiles, available in predefined lengths or cut to measure, and mounting brackets or suspension cables. IP20 or IP40 protection degree depending on the selected lighting combinations.

Technical Sheet

