
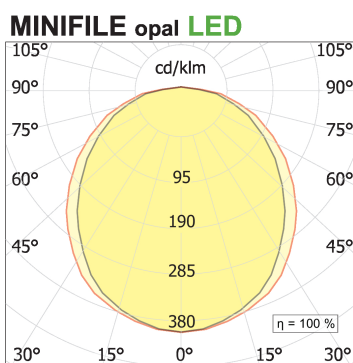


## Minifile suspension

code ML300.827/01

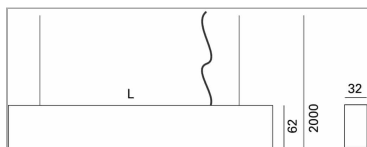

### PRODUCT DESCRIPTION

Direct light indoor suspension lamp made of extruded aluminium 6060, complete with LED; colour rendering index CRI >90. Professional led modules 12.8 W assembled and wired on extruded aluminium heatsink with high performance reflector, equipped with harmonic steel springs for installation in Tools free profile; 5-cable feed-through wiring with quick-connect terminal blocks; protocol On/Off. Steel suspension cables complete with chrome-plated brass micrometric adjusters. Lamp with colour finish white; white opal polycarbonate diffuser with diffusing film. IP40 degree of protection.

### PRODUCT SPECS

|                              |                       |
|------------------------------|-----------------------|
| Installation method          | Suspension            |
| Light source                 | LED                   |
| Absorbed power               | 12,8 W                |
| Color temperature            | 2700K                 |
| Color rendering index CRI    | >90                   |
| Finishing                    | White                 |
| Luminous flux of the product | 721 lm                |
| Luminous efficiency          | 56 lm/W               |
| MacAdam color tolerance      | 3                     |
| Life time estimate           | 50000h Ta 25° L80 B10 |
| Protocol                     | On/Off                |
| Energy efficiency class      | E                     |
| Dimension                    | L580 mm               |
| IP Grade                     | IP40                  |
| Power supply                 | 220-240V 50-60Hz      |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



