
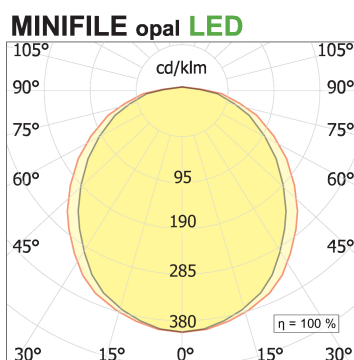


## Minifile suspension

code ML300.840D/01

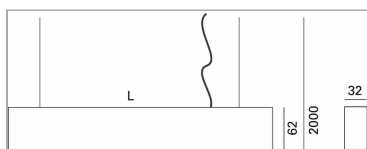

### PRODUCT DESCRIPTION

Direct light indoor suspension lamp made of extruded aluminium 6060, complete with LED; colour rendering index CRI >90. Professional led modules 12.8 W assembled and wired on extruded aluminium heatsink with high performance reflector, equipped with harmonic steel springs for installation in Tools free profile; 5-cable feed-through wiring with quick-connect terminal blocks; protocol Dimmable Dali. Steel suspension cables complete with chrome-plated brass micrometric adjusters. Lamp with colour finish white; white opal polycarbonate diffuser with diffusing film. IP40 degree of protection.

### PRODUCT SPECS

Installation method	Suspension
Light source	LED
Absorbed power	12,8 W
Color temperature	4000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	743 lm
Luminous efficiency	58 lm/W
MacAdam color tolerance	3
Life time estimate	50000h Ta 25° L80 B10
Protocol	Dimmable Dali
Energy efficiency class	E
Dimension	L580 mm
IP Grade	IP40
Power supply	220-240V 50-60Hz

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



