Minifile suspension with Leva group

code ML123.935WD/01

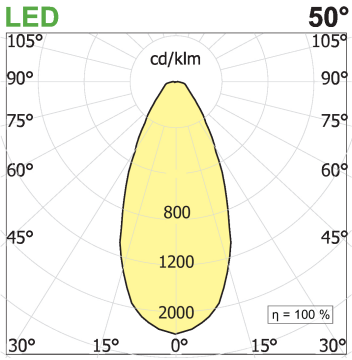

PRODUCT DESCRIPTION

Linear light module with direct emission. Profilo in estrusione di alluminio di sezione 40x66mm. Dotato di 2 gruppi serie LEVA da 5 spot con sorgenti LED ad alta resa cromatica e montati su dissipatore lineare in alluminio; ottica fissa con aperture disponibili 20° - 32° - 50° - 41°x18°. La composizione strutturale del sistema ottico determina un'emissione ad abbagliamento controllato (UGR 16). Schermi ciechi parziali in estrusione di alluminio predisposti per l'abbinamento con testate di chiusura da entrambi i lati. Impianto di alimentazione elettronica integrato nell'apparecchio. Opzionale la versione con dimmerazione DALI. Tipo di installazione a sospensione con cavi in acciaio e dotai di regolatori millimetrici.

PRODUCT SPECS

Installation method	Trimless recessed
Light source	LED
Absorbed power	10x2,2 W
Color temperature	3500K
Color rendering index CRI	>90
Optic	Wide
Finishing	White box - black optic
Luminous flux of the product	1801 lm
Luminous efficiency	82 lm/W
MacAdam color tolerance	2
Life time estimate	50000h Ta 25° L90B10
Protocol	Dimmable Dali
Energy efficiency class	E
Dimension	L1420 mm

WEB PAGE

ASSEMBLY INSTRUCTIONS

LUCIFERO'S SRL with sole shareholder - via del Tappezziere, 3 - 40138 Bologna - Italy - +39 051 6014276 - assistenza@luciferos.it - customercare@luciferos.it