
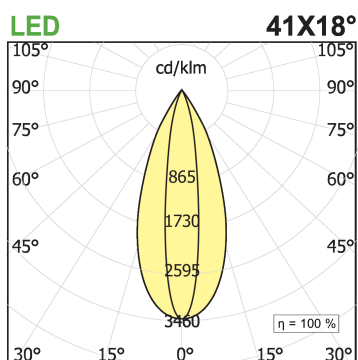
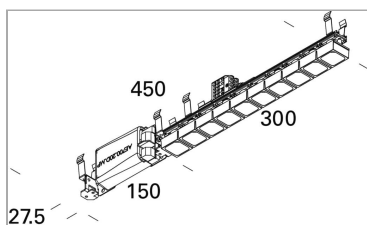


## Minifile system - Lever Module 10

code LV134.927ZD/01

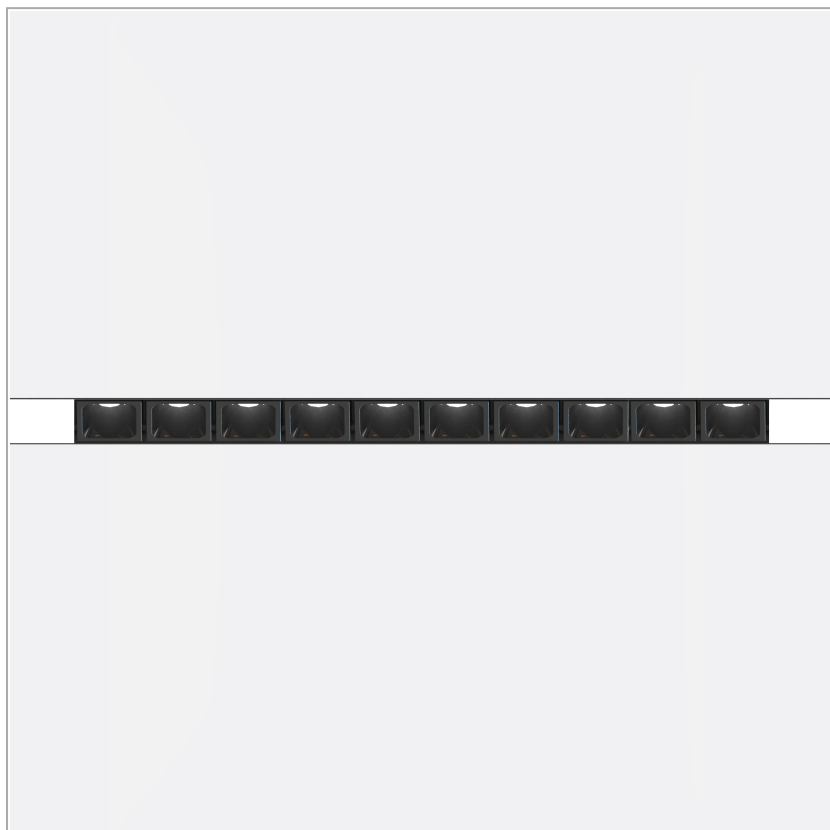

### PRODUCT DESCRIPTION

Modular system for direct, diffused, accent or wallwasher, made of 62x32 mm painted or anodised extruded aluminium empty profiles, available in predefined lengths or cut to measure. Available in wall-mounted, ceiling-mounted, suspended, trimless recessed or recessed with super-slim 5 mm. width edge trim versions. To be integrated with linear LED sources, LED spotlights, complete with 50/60 Hz 230/240 V electronic power supply. To be completed with Light Proof system side end caps, opal white polycarbonate diffusing screen, quick mounting extruded aluminium shapers (for linear LEDs and spotlight LEDs) or closing profiles, available in predefined lengths or cut to measure, and mounting brackets or suspension cables. IP20 or IP40 protection degree depending on the selected lighting combinations.

### PRODUCT SPECS

|                              |                      |
|------------------------------|----------------------|
| Installation method          | system               |
| Light source                 | LED                  |
| Absorbed power               | 10x2,2 W             |
| Color temperature            | 2700K                |
| Color rendering index CRI    | >90                  |
| Optic                        | Asymmetric 41°x18°   |
| Finishing                    | White                |
| Luminous flux of the product | 2150 lm              |
| Luminous efficiency          | 98 lm/W              |
| MacAdam color tolerance      | 2                    |
| Life time estimate           | 50000h Ta 25° L90B10 |
| Protocol                     | Dimmable Dali        |
| Energy efficiency class      | E                    |
| Dimension                    | L450xW27.5 mm        |
| IP Grade                     | IP20                 |
| Power supply                 | 220-240V 50-60Hz     |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

