
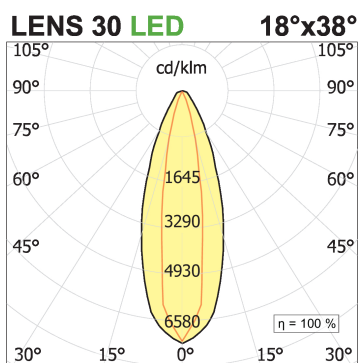


## System Focus 31S, for Minifile system

code FR060.930ZD/01

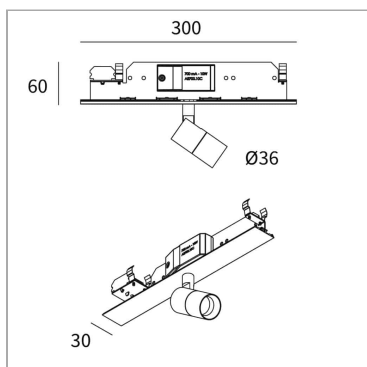

### PRODUCT DESCRIPTION

Modular system for direct, diffused, accent or wallwasher, made of 62x32 mm painted or anodised extruded aluminium empty profiles, available in predefined lengths or cut to measure. Available in wall-mounted, ceiling-mounted, suspended, trimless recessed or recessed with super-slim 5 mm. width edge trim versions. To be integrated with linear LED sources, LED spotlights, complete with 50/60 Hz 230/240 V electronic power supply. To be completed with Light Proof system side end caps, opal white polycarbonate diffusing screen, quick mounting extruded aluminium shapers (for linear LEDs and spotlight LEDs) or closing profiles, available in predefined lengths or cut to measure, and mounting brackets or suspension cables. IP20 or IP40 protection degree depending on the selected lighting combinations.

### PRODUCT SPECS

Installation method	system
Light source	LED
Absorbed power	8 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Asymmetric 18°x38°
Finishing	White
Luminous flux of the product	1048 lm
Luminous efficiency	131 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Protocol	Dimmable Dali
Energy efficiency class	D
Dimension	L300xH60 Ø36 mm
IP Grade	IP20
Power supply	220-240V 50-60Hz

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

