
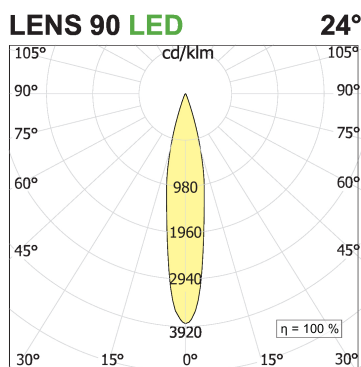
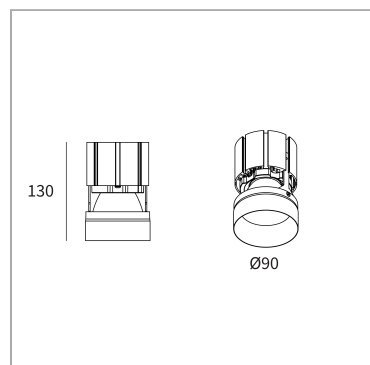


## Nyx Trimless fixed T80F - optic group

code LTN20K.927F/01

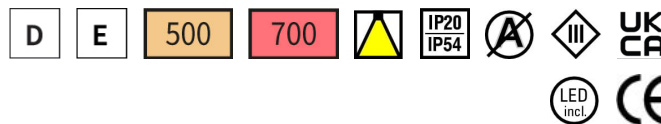

### PRODUCT DESCRIPTION

Set of recessed spots available square or round section, the lighting source is positioned in anti-dazzle rearward position, different light source and capacity. It is possible to recess the spots in three different level in the plasterboard with patented system and in the brickwall: total recessed, semi recessed 10 mm of projection, semi-recessed 20 mm of projection. The model 45 is a total recessed lamp characterized by the 45 degrees inclination of the lamp's body.

### PRODUCT SPECS

|                              |                              |
|------------------------------|------------------------------|
| Installation method          | Trimless recessed            |
| Light source                 | LED                          |
| Absorbed power               | 17 W / 24,3 W                |
| Color temperature            | 2700K                        |
| Color rendering index CRI    | >90                          |
| Optic                        | Flood 24°                    |
| Finishing                    | White                        |
| Luminous flux of the product | 1830 lm / 2598 lm            |
| Luminous efficiency          | 108 lm/W / 107 lm/W          |
| MacAdam color tolerance      | 3                            |
| Life time estimate           | 3SDCM 50000h L90 B10 ta 25°C |
| Energy efficiency class      | D / E                        |
| Weight                       | 0.80 Kg                      |
| Dimension                    | H136 Ø90 mm                  |
| Hole size                    | Ø 110 mm                     |
| IP Grade                     | IP20/54 / IP20/54            |
| Protection Class             | Class III appliance          |
| Product Spec                 | Circular shape               |
| Power supply/Transformer     | Not included                 |
| Protocol                     | See power supply             |

### WEB PAGE




### ASSEMBLY INSTRUCTIONS



## MANDATORY ACCESSORIES

### Accessori Outer Casing Nyx T For False Ceiling T80F outer casing for plasterbord




code LTN06A

Trimless recessed indoor outer casing for plasterboard

Technical Sheet



### Accessori Wallbox Nyx For Brickwall T80F outer casing box for brick wall



code LTN06B

Trimless recessed indoor outer casing for brick wall square shape

Technical Sheet



### AE500.20C1



code AE500.20C1

Electronic power supply current

### AE700.32C1.MP (Copia)



code AE700.30C.MP


Electronic power supply current

Technical Sheet



## OPTIONAL ACCESSORIES

### Accessori Lens Ø 74 Satin lens Ø 74



code L074S

uncategorized


Technical Sheet



### Accessori Lens Ø 74 Elissoidal lens Ø 74

Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.  
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.  
We reserve the right to make changes to our products at any time.

Page 2 / 4




code L074E

uncategorized

Technical Sheet



### Accessori Lens ø 74 Asymmetric lens Ø 74




code L074A

uncategorized

Technical Sheet



### Accessori Lens ø 74 Honey comb louver Ø 74



code L074R

uncategorized

Technical Sheet



