Nyx Trimless fixed T80F - optic group

code LTN20K.927W/01

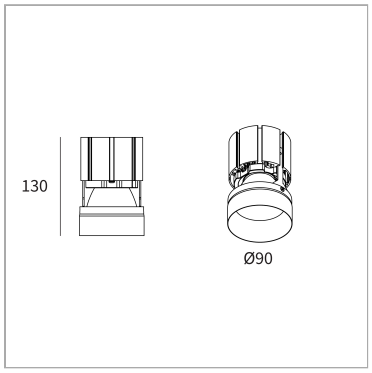

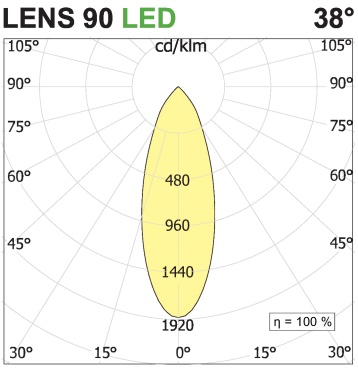

PRODUCT DESCRIPTION

Set o recessed spots available square or round section, the lighting source is positioned in anti-dazzle reaward position, different light source and capacity.It is possible to recess the spots in three different level in the plasterboard with patented system and in the brickwall: total recessed, semi recessed 10 mm of projection, semi-recessed 20 mm of projection.The model 45 is a total recessed lamp characterized by the 45 degrees inclination of the lamp's body.

PRODUCT SPECS

Installation method	Trimless recessed
Light source	LED
Absorbed power	17 W / 24,3 W
Color temperature	2700K
Color rendering index CRI	>90
Optic	Wide 38°
Finishing	White
Luminous flux of the product	1925 lm / 2706 lm
Luminous efficiency	113 lm/W / 111 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 ta 25°C
Energy efficiency class	D / E
Weight	0.80 Kg
Dimension	H136 Ø90 mm
Hole size	Ø 110 mm
IP Grade	IP20/54 / IP20/54
Protection Class	Class III appliance
Product Spec	Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE

ASSEMBLY INSTRUCTIONS

Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.
We reserve the right to make changes to our products at any time.

LUCIFERO'S SRL with sole shareholder - via del Tappezziere, 3 - 40138 Bologna - Italy - +39 051 6014276 - assistenza@luciferos.it - customercare@luciferos.it

MANDATORY ACCESSORIES

Accessori Outer Casing Nyx T For False Ceiling T80F outer casing for plasterbord



code LTN06A

Trimless recessed indoor outer casing for plasterboard

Technical Sheet

Accessori Wallbox Nyx For Brickwall T80F outer casing box for brick wall



code LTN06B

Trimless recessed indoor outer casing for brick wall square shape

Technical Sheet

AE500.20C1

code AE500.20C1

Electronic power supply current

AE700.32C1.MP (Copia)

code AE700.30C.MP

Electronic power supply current

Technical Sheet

OPTIONAL ACCESSORIES

Accessori Lens ø 74 Satin lens Ø 74



code L074S

uncategorized

Technical Sheet

Accessori Lens ø 74 Elissoidal lens Ø 74

LUCIFERO'S SRL with sole shareholder - via del Tappezziere, 3 - 40138 Bologna - Italy - +39 051 6014276 - assistenza@luciferos.it - customercare@luciferos.it



code L074E

uncategorized

Technical Sheet

Accessori Lens ø 74 Asymmetric lens Ø 74



code L074A

uncategorized

Technical Sheet

Accessori Lens ø 74 Honey comb louver Ø 74



code L074R

uncategorized

Technical Sheet

LUCIFERO'S SRL with sole shareholder - via del Tappezziere, 3 - 40138 Bologna - Italy - +39 051 6014276 - assistenza@luciferos.it - customercare@luciferos.it

LUCIFERO'S SRL with sole shareholder - via del Tappezziere, 3 - 40138 Bologna - Italy - +39 051 6014276 - assistenza@luciferos.it - customercare@luciferos.it