
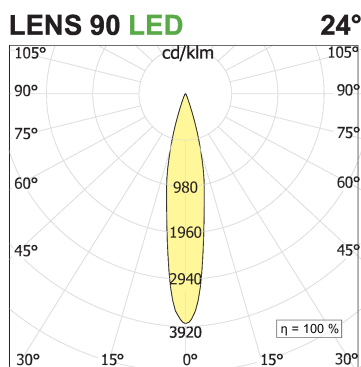
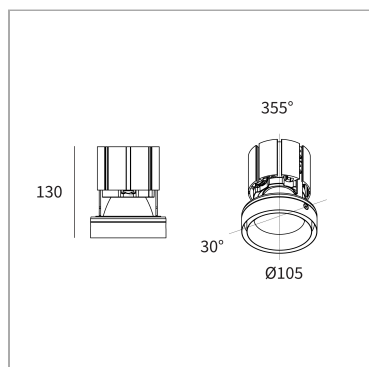


Nyx Trimless Directional T80D - optic group

code LTN25K.930F/01

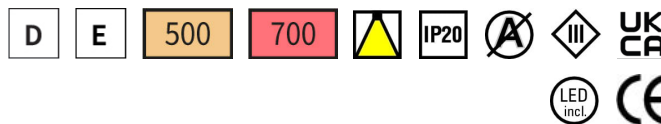

PRODUCT DESCRIPTION

Round or square, fix or directional, trimless recessed downlight for ceiling installation, for accentor diffused lighting. Light source in recessed position for anti-glare lighting. Available both in plasterboard false-ceiling and in concrete/brick wall installation version. For integrated LED source or for 12V/230V QR-CB 35, QR-CB 51 and QR-LP 111 or 230V QPAR16 GU10 halogen/led lamps. Body and optical group in painted aluminum. Version with integrated Chip On Board LED source provided with 99,99% pure aluminum coated reflector. Directional versions: optical group adjustable 355° horizontally and +/- 20° vertically. Remote power-supply available as an accessory. Degree of protection IP20/IP23/IP54.

PRODUCT SPECS

Installation method	Trimless recessed
Light source	LED
Absorbed power	17 W / 24,3 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Flood 24°
Finishing	White
Luminous flux of the product	1903 lm / 2701 lm
Luminous efficiency	112 lm/W / 111 lm/W
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 ta 25°C
Energy efficiency class	D / E
Weight	0.9 Kg
Dimension	H127 Ø105 mm
Hole size	125 mm
IP Grade	IP20
Protection Class	Class III appliance
Product Spec	Adjustable, Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified. We reserve the right to make changes to our products at any time.

Page 1 / 3

MANDATORY ACCESSORIES

Outer Casing Nyx T80D trimless for false ceiling




code LTN08A

Trimless recessed uncategorized wallbox for false ceiling

Technical Sheet



Accessori Wallbox Nyx For Brickwall T80D outer casing box for brick wall



code LTN08B

Trimless recessed indoor outer casing for brick wall square shape

Technical Sheet



AE500.20C1



code AE500.20C1

Electronic power supply current

AE700.32C1.MP (Copia)



code AE700.30C.MP


Electronic power supply current

Technical Sheet



OPTIONAL ACCESSORIES

Accessori Lens Ø 74 Satin lens Ø 74



code L074S

uncategorized


Technical Sheet



Accessori Lens Ø 74 Elissoidal lens Ø 74

Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.
We reserve the right to make changes to our products at any time.

Page 2 / 3




code L074E

uncategorized

Technical Sheet



Accessori Lens $\varnothing$ 74 Asymmetric lens $\varnothing$ 74




code L074A

uncategorized

Technical Sheet



Accessori Lens $\varnothing$ 74 Honey comb louver $\varnothing$ 74



code L074R

uncategorized

Technical Sheet

