
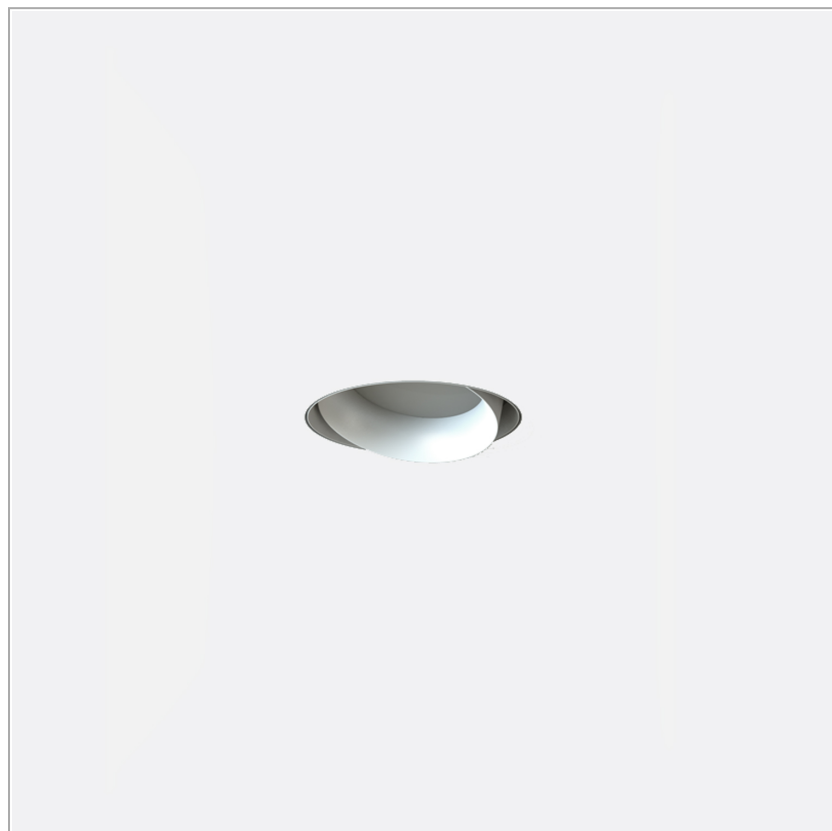


## Nyx Trimless Directional T80D - optic group

code LTN25K.9TWW/01


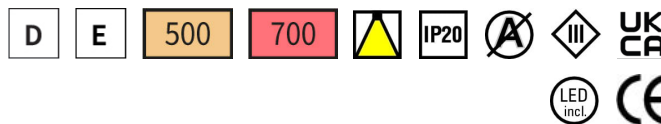


### PRODUCT DESCRIPTION

Round or square, fix or directional, trimless recessed downlight for ceiling installation, for accent or diffused lighting. Light source in recessed position for anti-glare lighting. Available both in plasterboard false-ceiling and in concrete/brick wall installation version. For integrated LED source or for 12V/230V QR-CB 35, QR-CB 51 and QR-LP 111 or 230V QPAR16 GU10 halogen/led lamps. Body and optical group in painted aluminum. Version with Integrated Chip On Board LED source provided with 99,99% pure aluminum coated reflector. Directional versions: optical group adjustable 355° horizontally and +/- 20° vertically. Remote power-supply available as an accessory. Degree of protection IP20/IP23/IP54.

### PRODUCT SPECS

Installation method	Trimless recessed
Light source	LED
Absorbed power	17 W / 24,3 W
Color temperature	Tunable White
Color rendering index CRI	>90
Optic	Wide 38°
Finishing	White
MacAdam color tolerance	3
Life time estimate	3SDCM 50000h L90 B10 ta 25°C
Energy efficiency class	D / E
Weight	0.9 Kg
Dimension	H127 Ø105 mm
Hole size	125 mm
IP Grade	IP20
Protection Class	Class III appliance
Product Spec	Adjustable, Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

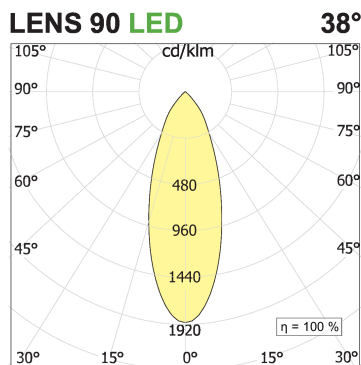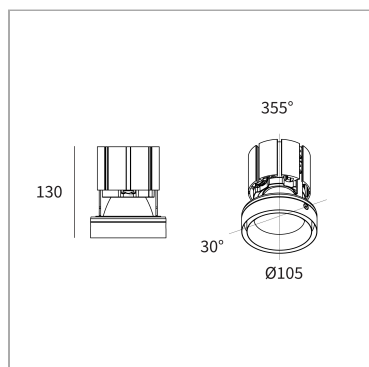

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## MANDATORY ACCESSORIES

### Outer Casing Nyx T80D trimless for false ceiling




code LTN08A

Trimless recessed uncategorized wallbox for false ceiling

Technical Sheet



### Accessori Wallbox Nyx For Brickwall T80D outer casing box for brick wall



code LTN08B

Trimless recessed indoor outer casing for brick wall square shape

Technical Sheet



### AE500.20C1



code AE500.20C1

Electronic power supply current

### AE700.32C1.MP (Copia)



code AE700.30C.MP


Electronic power supply current

Technical Sheet



## OPTIONAL ACCESSORIES

### Accessori Lens ø 74 Satin lens Ø 74



code L074S

uncategorized


Technical Sheet



### Accessori Lens ø 74 Elissoidal lens Ø 74

Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.  
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.  
We reserve the right to make changes to our products at any time.

Page 2 / 3




code L074E

uncategorized

Technical Sheet



### Accessori Lens ø 74 Asymmetric lens Ø 74




code L074A

uncategorized

Technical Sheet



### Accessori Lens ø 74 Honey comb louver Ø 74



code L074R

uncategorized

Technical Sheet

