

## Recessed Minifile profile with Leva modules

code ML023.930WD/01




### PRODUCT DESCRIPTION

Direct light recessed lamp with 5-light Leva modules.

### PRODUCT SPECS

|                              |                              |
|------------------------------|------------------------------|
| Installation method          | recessed                     |
| Light source                 | LED                          |
| Absorbed power               | 10x2,2 W                     |
| Color temperature            | 3000K                        |
| Color rendering index CRI    | >90                          |
| Optic                        | Wide 50°                     |
| Finishing                    | White box - black optic      |
| Luminous flux of the product | 1656 lm                      |
| Luminous efficiency          | 75 lm/W                      |
| MacAdam color tolerance      | 2                            |
| Life time estimate           | 50000h Ta 25° L90B10         |
| Protocol                     | Dimmable Dali / Touch & Dimm |
| Energy efficiency class      | E                            |
| Dimension                    | L1420 mm                     |
| Hole size                    | 42xL+2 mm                    |

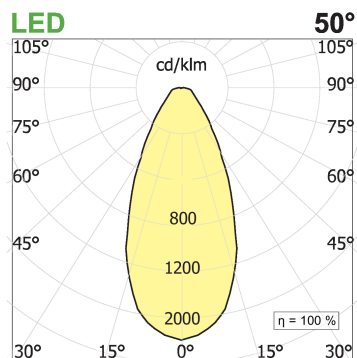

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.  
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.  
We reserve the right to make changes to our products at any time.

Page 1 / 1