
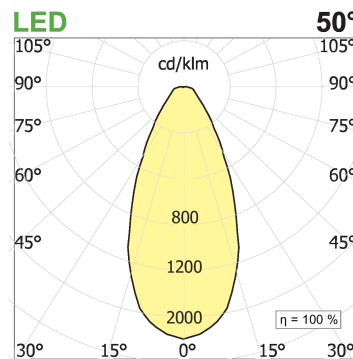
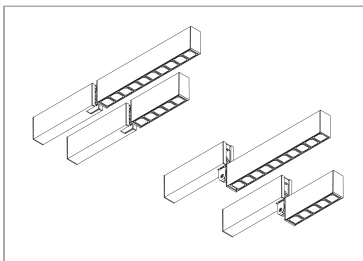


**Leva 5 Wall Rotate & slide version**

code LV034.930W/01

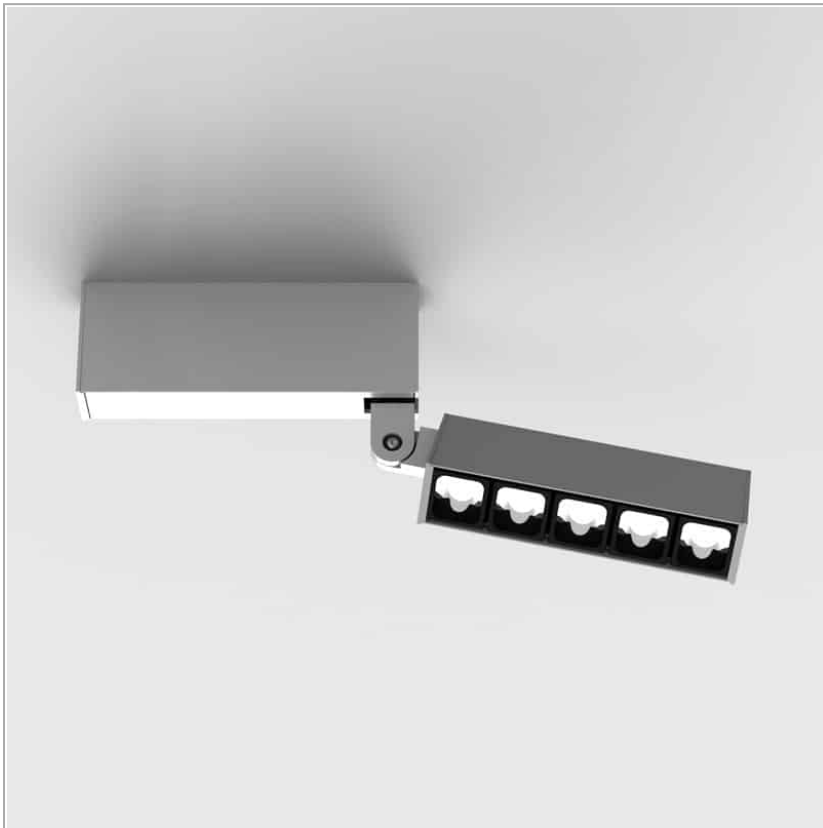

**PRODUCT DESCRIPTION**

Fix and adjustable projectors programme for chip on board LED sources. Mounting options: with frame and trimless recessed, ceiling and wall-mounted, 230V Eurostandard track and within the Lucifero's Container for Minifile and File 2. Fixture's body in painted extruded aluminum. Optical group complete with chip on board led, lens, antiglare housing and driver (except recessed versions and 1x and 3x ceiling/wall-mounted versions). Adjustable version for ceiling/wall mounting and for insertion within the Container for Minifile provided with special patented Soft Rotate & Slide mechanism, that allows the projector's extraction and aiming of 350° on the vertical axis and of 350° on the horizontal axis. Adjustable version for insertion within the Container for File 2 provided with special tilt mechanism, that allows the projector's extraction and aiming of +/-45° on the horizontal axis. Spot, flood and wide optics. UGR<19. Degree of protection IP23/43.

**PRODUCT SPECS**

Installation method	Wall surface mounted, Ceiling surface mounted
Light source	LED
Absorbed power	5x2,2 W
Color temperature	3000K
Color rendering index CRI	>90
Optic	Wide 50°
Finishing	White box - black optic
Luminous flux of the product	828 lm
Luminous efficiency	75 lm/W
MacAdam color tolerance	2
Durata media stimata	50000h Ta 25° L90B10
Power supply/transformer	Included
Protocol	On/Off
Energy efficiency class	E
Dimension	mm
IP Grade	IP20
Protection Class	Class I appliance
Product Spec	Soft-rotate & slide mechanism

**WEB PAGE**



**ASSEMBLY INSTRUCTIONS**



## OPTIONAL ACCESSORIES

### Container Minifile Kit rotate & slide



code LVKL01

Trimless, fully-retracting flush recessed modular systems for housing system profiles and MINIFILE, FILE, FILE 2, FILE 2 COMPLEMENTI, LEVA and FARETÈN finished modules for creating cuts of continuous light or where light modules alternate to voids, in plaster-board false-ceiling or false-walls or in concrete or brick walls. Painted or anodised extruded aluminium body, with a predefined length or cut to size. To be completed with side end caps and finishing cover for the empty spaces in a retracted position to determine an effect of solids and voids. Can also be used with LED linear light sources, to be completed with opal white PC diffusing screen and remote power supplies, to create retracted grooves of light.

Technical Sheet

