


## Leva Quadra Recessed Q9

code LV411.935W/01





### PRODUCT DESCRIPTION

Fix and adjustable projectors family with chip on board LED sources. Mounting options: recessed, with frame or trimless, ceiling and wall-mounted and on 48V tracks, such as the Multi System by Stucchi. Fixture's body in painted extruded aluminum. Optical group complete with CRI>90 chip on board led, lens, antiglare housing and electronic driver (except for recessed versions). The optical group is fixed in the recessed version and adjustable (0-90° on the horizontal axis and 355° on the vertical axis) in the surface-mounted and track versions. Spot, flood and wide optics. UGR<19. Degree of protection IP20/40.

### PRODUCT SPECS

|                              |                                              |
|------------------------------|----------------------------------------------|
| Installation method          | Recessed with frame, Ceiling surface mounted |
| Light source                 | LED                                          |
| Absorbed power               | 9x2,2 W                                      |
| Color temperature            | 3500K                                        |
| Color rendering index CRI    | >90                                          |
| Optic                        | Wide 50°                                     |
| Finishing                    | White box - black optic                      |
| Luminous flux of the product | 1621 lm                                      |
| Luminous efficiency          | 82 lm/W                                      |
| MacAdam color tolerance      | 2                                            |
| Life time estimate           | 50000h Ta 25° L90B10                         |
| Energy efficiency class      | E                                            |
| Weight                       | 0.90 Kg                                      |
| Dimension                    | L98xW98xH115 mm                              |
| Hole size                    | 80 mm mm                                     |
| IP Grade                     | IP20                                         |
| Protection Class             | Class III appliance                          |
| Power supply/Transformer     | Not included                                 |
| Protocol                     | See power supply                             |

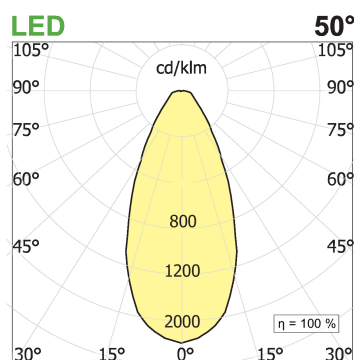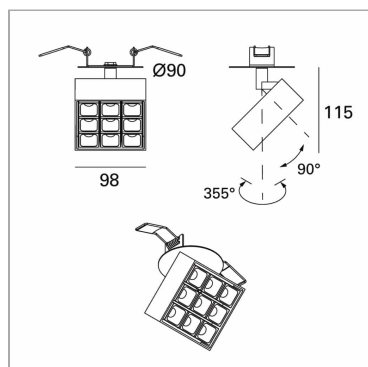

### WEB PAGE



### ASSEMBLY INSTRUCTIONS

