

Semplice Wall/ceiling Projector P55

code SE503.940F/01





PRODUCT DESCRIPTION

Luminaire for interiors direct projection light, with adjustable optics. Optical unit made in extruded aluminum rotatable 180 degrees on the horizontal axis. The friction hinge system bound to the base allows easy rotation/adjustment in all direction with an anti rotational locking system of 355° along the vertical axis.

PRODUCT SPECS

Installation method	Wall surface mounted, Ceiling surface mounted
Light source	Led-en
Absorbed power	12 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Flood 27°
Finishing	White
Luminaire luminous flux	1333 lm
Luminous efficiency	111 lm/W
MacAdam color tolerance	2
Durata media stimata	2SDCM 50000h L90 B10 ta 25°C
Power supply/transformer	Included
Protocol	On/Off
Energy efficiency class	E
Weight	1.0 Kg
Dimension	H200 Ø55 mm
IP Grade	IP20

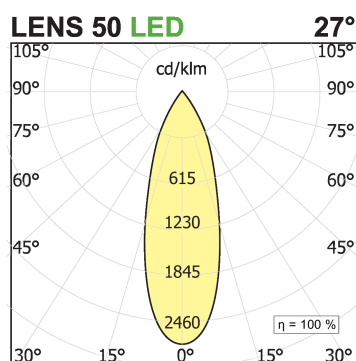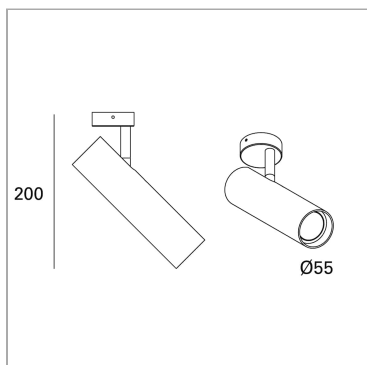

WEB PAGE



ASSEMBLY INSTRUCTIONS



OPTIONAL ACCESSORIES

Accessori Lens With Ring Asymmetric lens with ring ø55



code L055A.A

uncategorized. White finishing
Warning: Not suitable with halogen lamp

Technical Sheet



code L055A.A

uncategorized. Black finishing
Warning: Not suitable with halogen lamp

Technical Sheet



Accessori Lens With Ring Elipsoid lens with ring ø55



code L055E.A

uncategorized. White finishing
Warning: Not suitable with halogen lamp

Technical Sheet




code L055E.A

uncategorized. Black finishing
Warning: Not suitable with halogen lamp

Technical Sheet



Accessori Lens With Ring Honeycomb louver with ring ø55




code L055R.A

uncategorized. White finishing

Technical Sheet





code L055R.A

uncategorized. Black finishing

Technical Sheet



Accessori Lens With Ring Satin lens with rings ø55



code L055S.A

uncategorized. White finishing

Warning: Not suitable with halogen lamp

Technical Sheet



code L055S.A

uncategorized. Black finishing

Warning: Not suitable with halogen lamp

Technical Sheet



