


File Flex Circle Ceiling Diffused

code FXA31.840/01


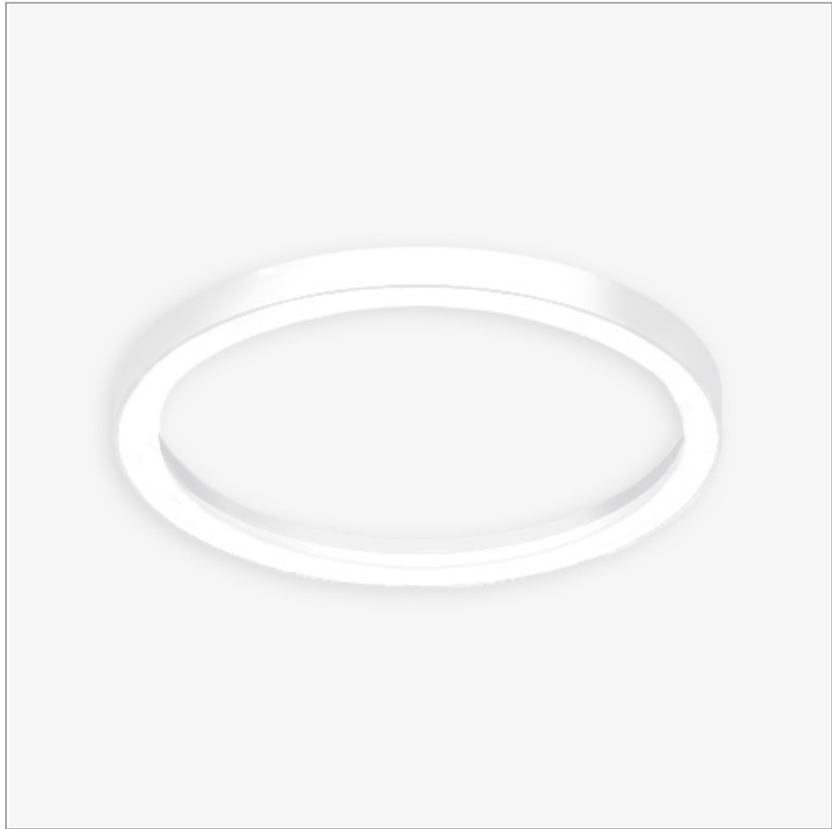


PRODUCT DESCRIPTION

Registered design

PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	Led-en
Absorbed power	33 W
Color temperature	4000K
Color rendering index CRI	>80
Finishing	White
Luminaire luminous flux	1925 lm
Luminous efficiency	58 lm/W
MacAdam color tolerance	3
Power supply/transformer	Not included
Protocol	See power supply
Energy efficiency class	D
Weight	2.5 Kg
Dimension	Ø500 mm
IP Grade	IP40
Protection Class	Class III appliance
Product Spec	Circular shape

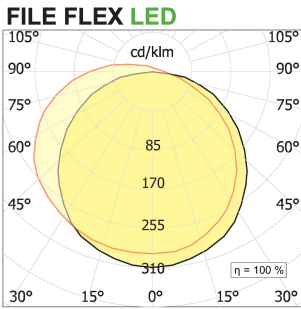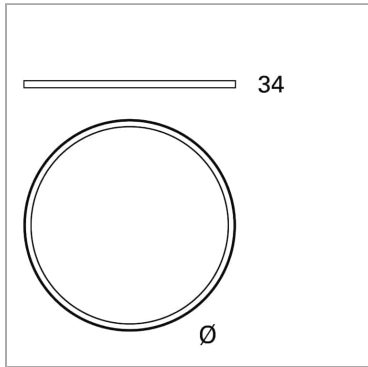

WEB PAGE



ASSEMBLY  
INSTRUCTIONS



