


## File Flex Circle Ceiling Diffused

code FXA31.830/01


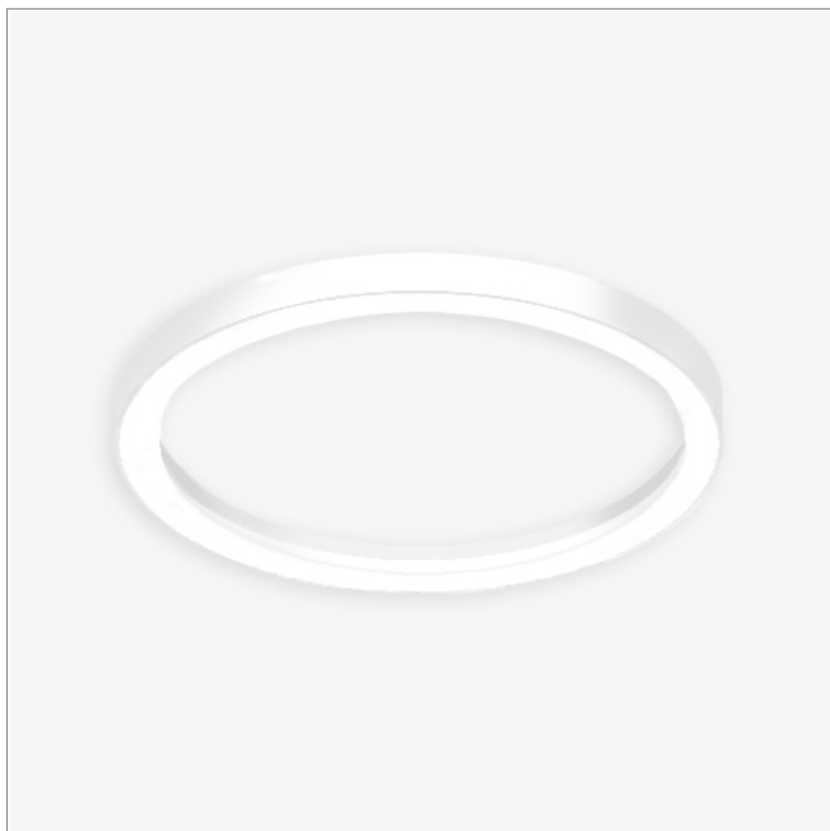


### PRODUCT DESCRIPTION

Registered design

### PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	Led
Absorbed power	33 W
Color temperature	3000K
Color rendering index CRI	>80
Finishing	White
Luminaire luminous flux	1886 lm
Luminous efficiency	57 lm/W
MacAdam color tolerance	3
Power supply/transformer	Not included
Protocol	See power supply
Voltage	24 V
Energy efficiency class	D
Weight	2.5 Kg
Dimension	Ø500 mm
IP Grade	IP40
Protection Class	Class III appliance
Product Spec	Circular shape

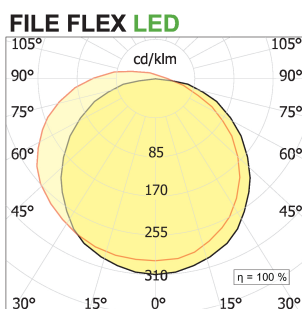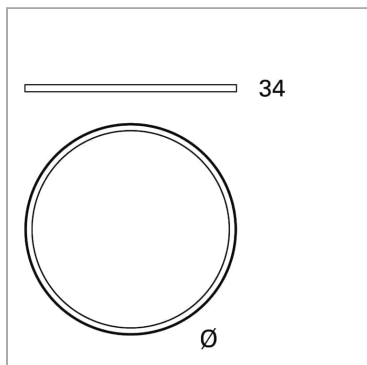

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



