


## File Flex Circle Ceiling Diffused

code FXA33.840/01


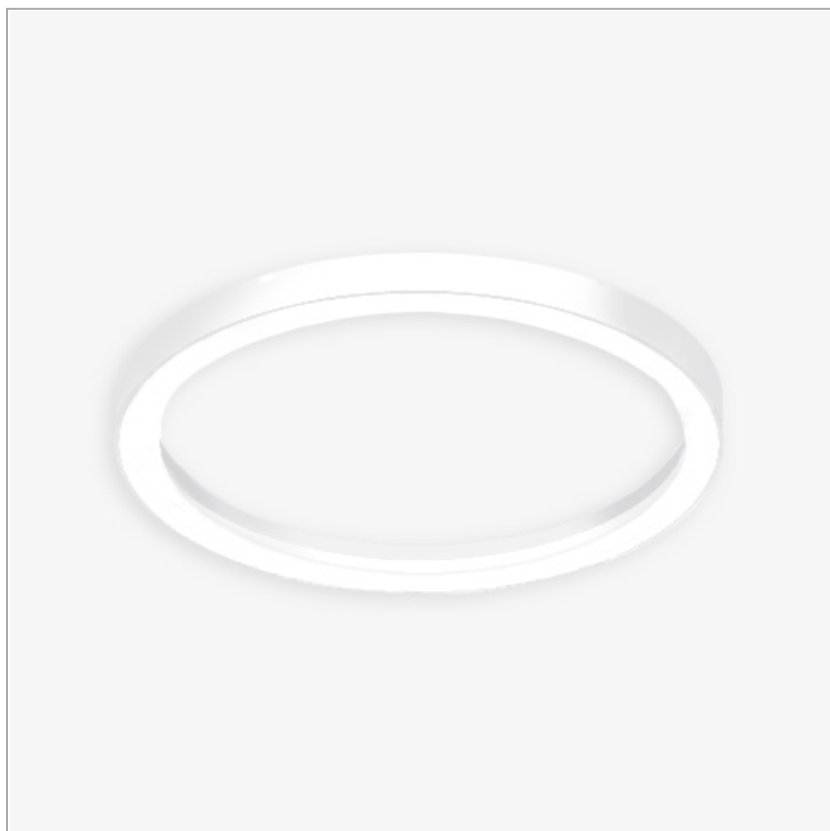


### PRODUCT DESCRIPTION

Registered design

### PRODUCT SPECS

Installation method	Ceiling surface mounted
Absorbed power	67 W
Color temperature	4000K
Color rendering index CRI	>80
Finishing	White
Luminaire luminous flux	9890 lm
Luminous efficiency	148 lm/W
MacAdam color tolerance	3
Power supply/transformer	Not included
Protocol	See power supply
Energy efficiency class	D
Weight	4.8 Kg
Dimension	Ø1000 mm
IP Grade	IP40
Protection Class	Class III appliance
Product Spec	Circular shape

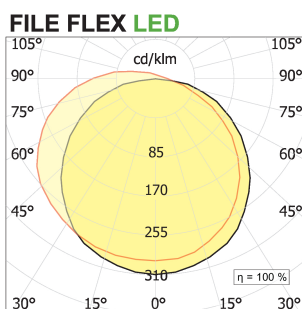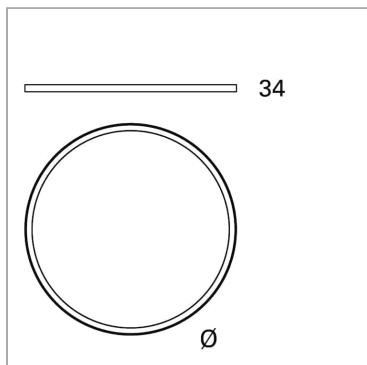

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



