
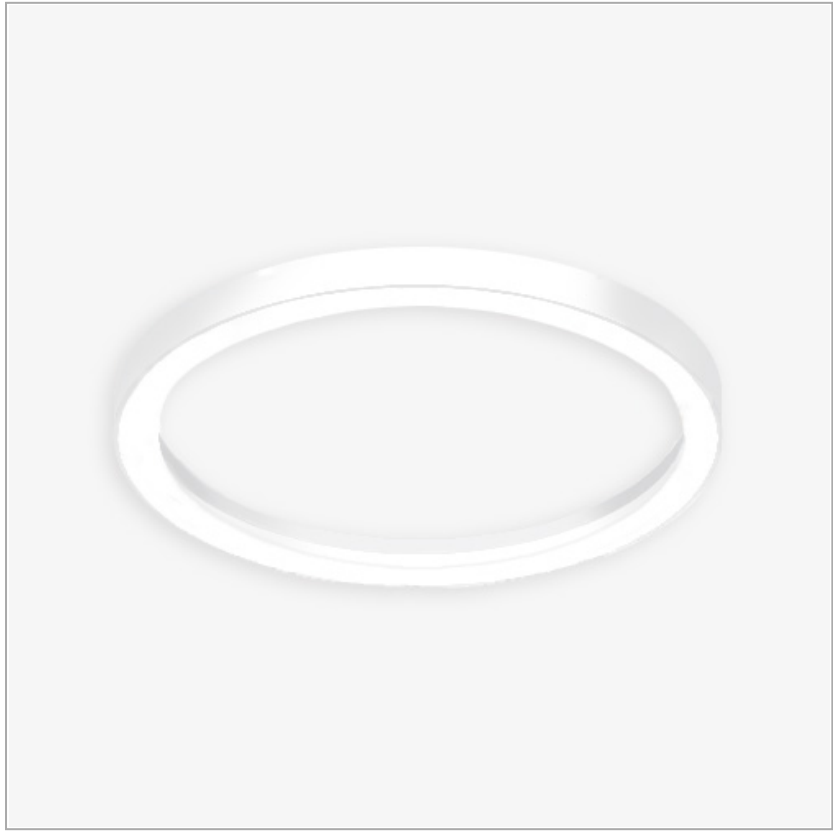


File Flex Circle Ceiling Diffused

code FXA36.840/01


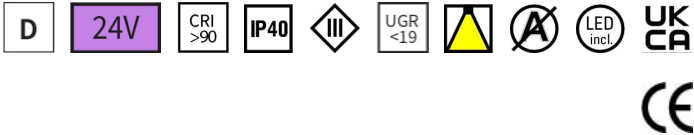


PRODUCT DESCRIPTION

Registered design

PRODUCT SPECS

Installation method	Ceiling surface mounted
Light source	Led
Absorbed power	121 W
Color temperature	4000K
Color rendering index CRI	>80
Finishing	White
Luminaire luminous flux	7090 lm
Luminous efficiency	59 lm/W
MacAdam color tolerance	3
Power supply/transformer	Not included
Protocol	See power supply
Energy efficiency class	D
Weight	8.9 Kg
Dimension	Ø1800 mm
IP Grade	IP40
Protection Class	Class III appliance
Product Spec	Circular shape

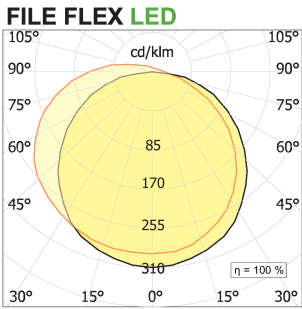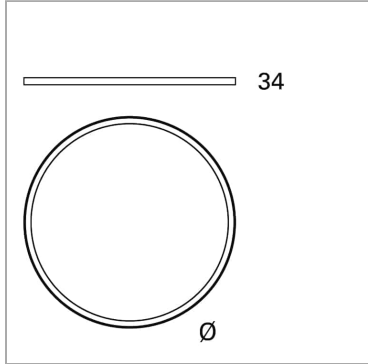

WEB PAGE



ASSEMBLY
INSTRUCTIONS



