

# **File Flex Circle Ceiling Diffused**




















## code FXA36.830/01

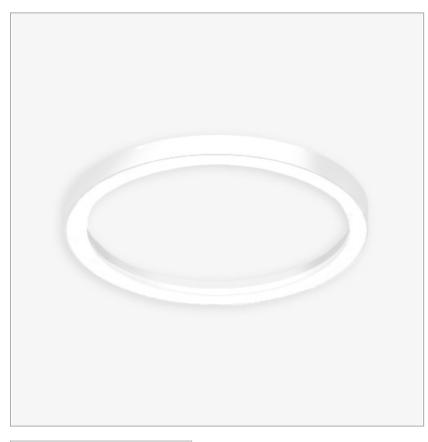



# **PRODUCT DESCRIPTION**

Registered design

## **PRODUCT SPECS**

Installation method	Ceiling surface mounted
Light source	LED
Absorbed power	121 W
Color temperature	3000K
Color rendering index CRI	>90
Finishing	White
Luminous flux of the product	7068 lm
Luminous efficiency	58 lm/W
MacAdam color tolerance	3
Life time estimate	50000h L90 B10 Ta 25°C
Protocol	On/Off
Energy efficiency class	D
Weight	8.9 Kg
Dimension	Ø1800 mm
IP Grade	IP40
Protection Class	Class III appliance
Product Spec	Circular shape
Power supply/Transformer	Not included
Protocol	See power supply





#### **WEB PAGE**







Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres. Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified. We reserve the right to make changes to our products at any time.

