


## File Flex Circle Ceiling Diffused

code FXA37.830/01


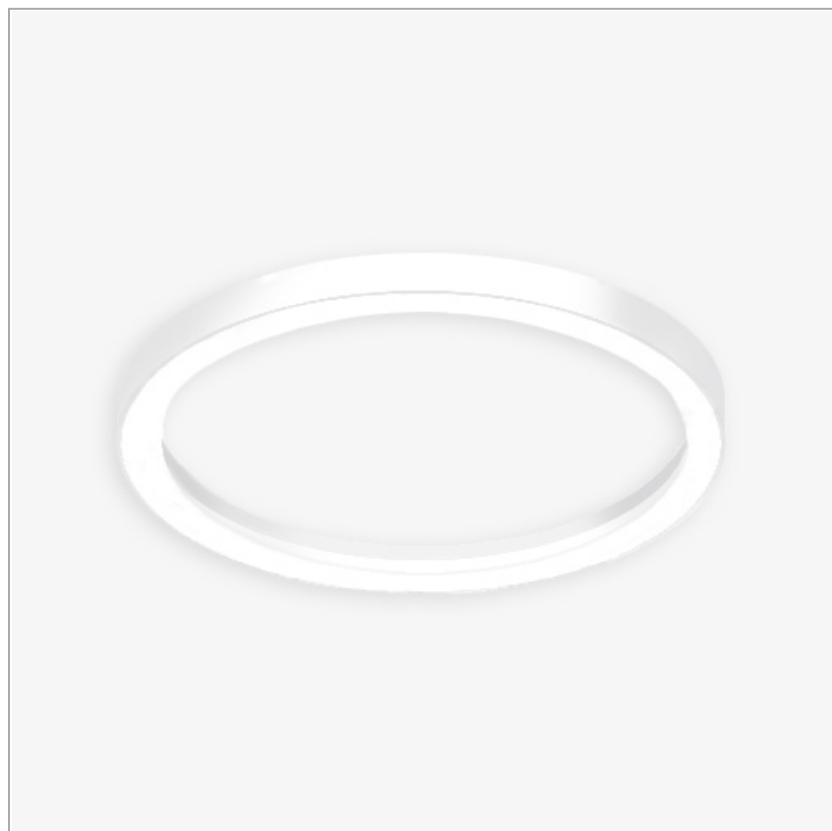


### PRODUCT DESCRIPTION

Registered design

### PRODUCT SPECS

Installation method	Ceiling surface mounted
Absorbed power	169 W
Color temperature	3000K
Color rendering index CRI	>80
Finishing	White
Luminaire luminous flux	25113 lm
Luminous efficiency	149 lm/W
MacAdam color tolerance	3
Power supply/transformer	Not included
Protocol	See power supply
Energy efficiency class	D
Weight	12.2 Kg
Dimension	Ø2500 mm
IP Grade	IP40
Protection Class	Class III appliance
Product Spec	Circular shape

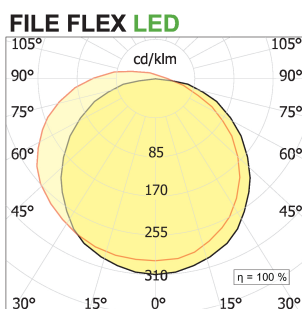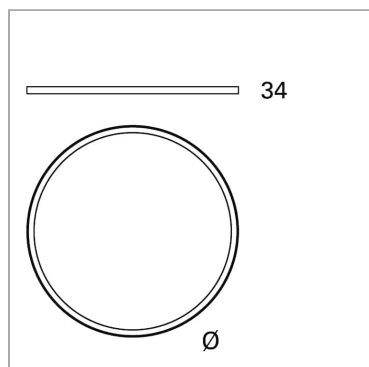

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



