

## **File Flex Circle Ceiling Diffused**

code FXA38.830/01




















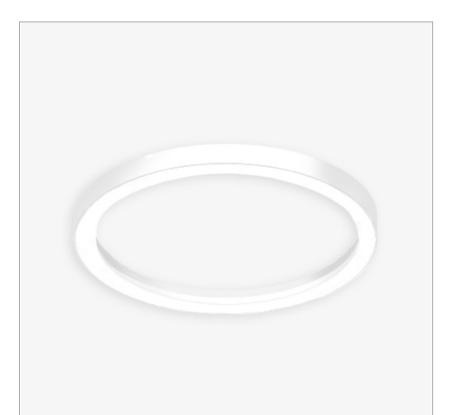



## **PRODUCT DESCRIPTION**

Registered design

## **PRODUCT SPECS**

Installation method	Ceiling surface mounted
Light source	Led
Absorbed power	203 W
Color temperature	3000K
Color rendering index CRI	>80
Finishing	White
Luminaire luminous flux	11887 lm
Luminous efficiency	59 lm/W
MacAdam color tolerance	3
Power supply/transformer	Not included
Protocol	See power supply
Energy efficiency class	D
Weight	14.8 Kg
Dimension	Ø3000 mm
IP Grade	IP40
Protection Class	Class III appliance
Product Spec	Circular shape





**WEB PAGE** 



ASSEMBLY INSTRUCTIONS



