


Ipipedi Q Wall G9 double emission

code PPQ10/01

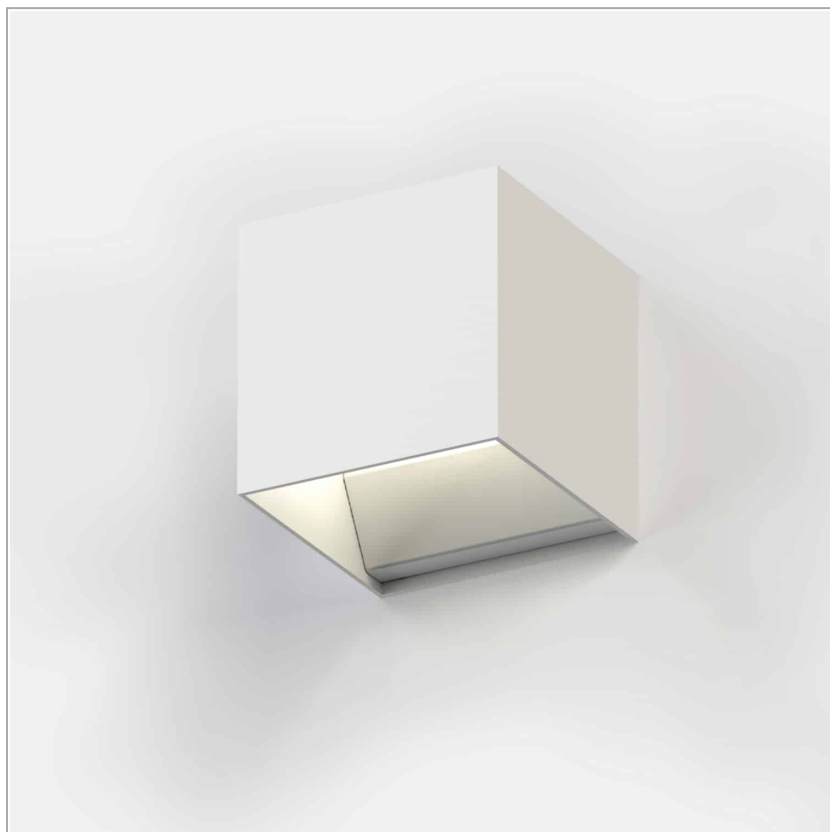


PRODUCT DESCRIPTION


Wall and ceiling –mounted lighting fittings with direct or direct/indirect lighting emission. For 230V QPAR16 GU10 or QT14C G9 halogen/LED lamps. Body in painted extruded aluminum of square cross-section. Complete with ceiling or wall fixing bracket. Degree of protection IP20.

PRODUCT SPECS

Installation method	Wall surface mounted
Light source	QT-14 c
Absorbed power	max 60 W
Finishing	White
Energy efficiency class	D
Dimension	L100xW100xH100 mm
IP Grade	IP20
Power supply/Transformer	Not included
Protocol	See power supply

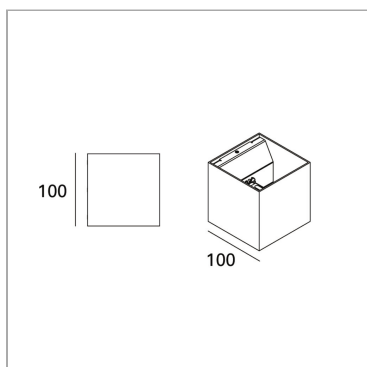

IPIPEDI Q

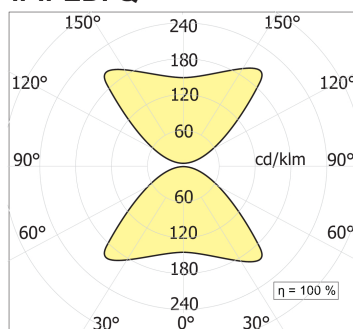

WEB PAGE



ASSEMBLY INSTRUCTIONS





Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.
Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.
We reserve the right to make changes to our products at any time.

Page 2 / 2