

## Ci 50 adjustable for plasterboard or brick wall

code LT1170.940F/01




### PRODUCT DESCRIPTION

Round recessed wall/ceiling spotlight with directional lamp support

### PRODUCT SPECS

|                              |                             |
|------------------------------|-----------------------------|
| Installation method          | Recessed with frame         |
| Light source                 | LED                         |
| Absorbed power               | 8 W / 12 W                  |
| Color temperature            | 4000K                       |
| Color rendering index CRI    | >90                         |
| Optic                        | Flood 27°                   |
| Finishing                    | White                       |
| Luminous flux of the product | 1089 lm / 1333 lm           |
| Luminous efficiency          | 136 lm/W / 111 lm/W         |
| MacAdam color tolerance      | 2                           |
| Life time estimate           | 2SCDM 50.000h L90 B10 ta25° |
| Energy efficiency class      | D                           |
| Dimension                    | H100 Ø77 mm                 |
| Hole size                    | Ø70 mm                      |
| IP Grade                     | IP20                        |
| Protection Class             | Class III appliance         |
| Product Spec                 | Adjustable, Circular shape  |
| Power supply/Transformer     | Not included                |
| Protocol                     | See power supply            |

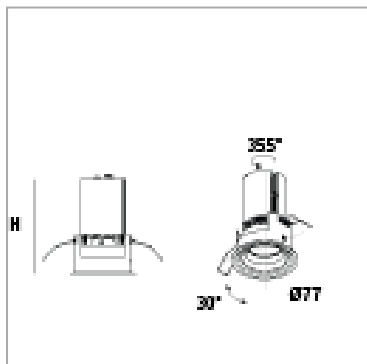

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



## OPTIONAL ACCESSORIES

### Accessori Wallbox Wallbox CI50 e CI50/50F



code LT9062.1

Galvanized metal wallbox to be recessed in brick walls or reinforced concrete to fit the article CI50 and CI50F

Technical Sheet

