

Ci 50 adjustable for plasterboard or brick wall

code LT1168.940F/01




PRODUCT DESCRIPTION

Round recessed wall/ceiling spotlight with directional lamp support

PRODUCT SPECS

Installation method	Recessed with frame
Light source	LED
Absorbed power	12 W / 18 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Flood 27°
Finishing	White
Luminous flux of the product	1333 lm / 2394 lm
Luminous efficiency	111 lm/W / 133 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Energy efficiency class	D
Dimension	H120 Ø77 mm
Hole size	Ø70 mm
IP Grade	IP20
Protection Class	Class III appliance
Product Spec	Adjustable, Circular shape
Power supply/Transformer	Not included
Protocol	See power supply

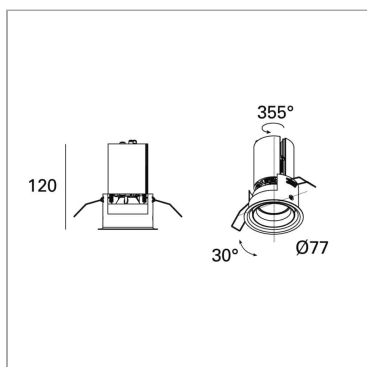

WEB PAGE



ASSEMBLY INSTRUCTIONS



OPTIONAL ACCESSORIES

Accessori Wallbox Wallbox CI50 e CI50/50F



code LT9062.1

Galvanized metal wallbox to be recessed in brick walls or reinforced concrete to fit the article CI50 and CI50F

Technical Sheet

