

Mini Track - IPipedi 55/125h

code PP120.940FD/01





PRODUCT DESCRIPTION

Lighting fixtures with indoor track characterized by a sectional tube made of extruded aluminum 55 mm in diameter. Led cob cri>90. 2000mm suspension cable. Color finish white. Degree of protection IP20.

PRODUCT SPECS

Installation method	Mini Track
Light source	LED
Absorbed power	18 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Flood 27°
Finishing	White
Luminous flux of the product	1603 lm
Luminous efficiency	89 lm/W
MacAdam color tolerance	2
Life time estimate	2SCDM 50.000h L90 B10 ta25°
Protocol	Dimmable Dali
Energy efficiency class	D
Dimension	H300 Ø55 mm
IP Grade	IP20
Power supply/Transformer	Not included
Protocol	See power supply

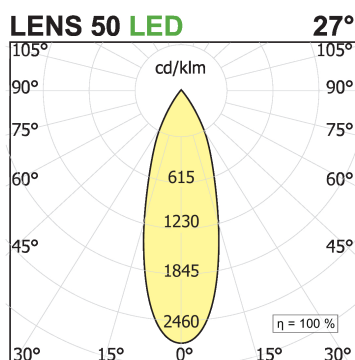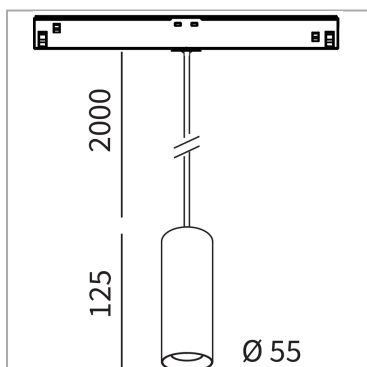

WEB PAGE



ASSEMBLY INSTRUCTIONS

