
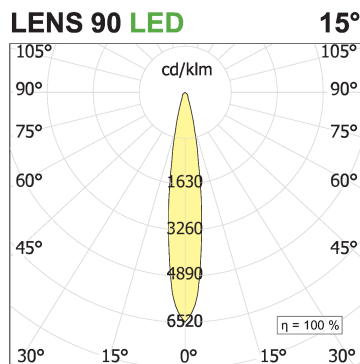
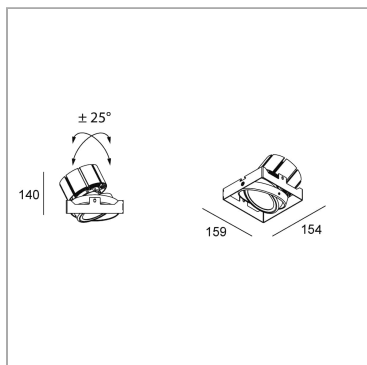


Incas Led Minimal 1

code IN01M.940S/01

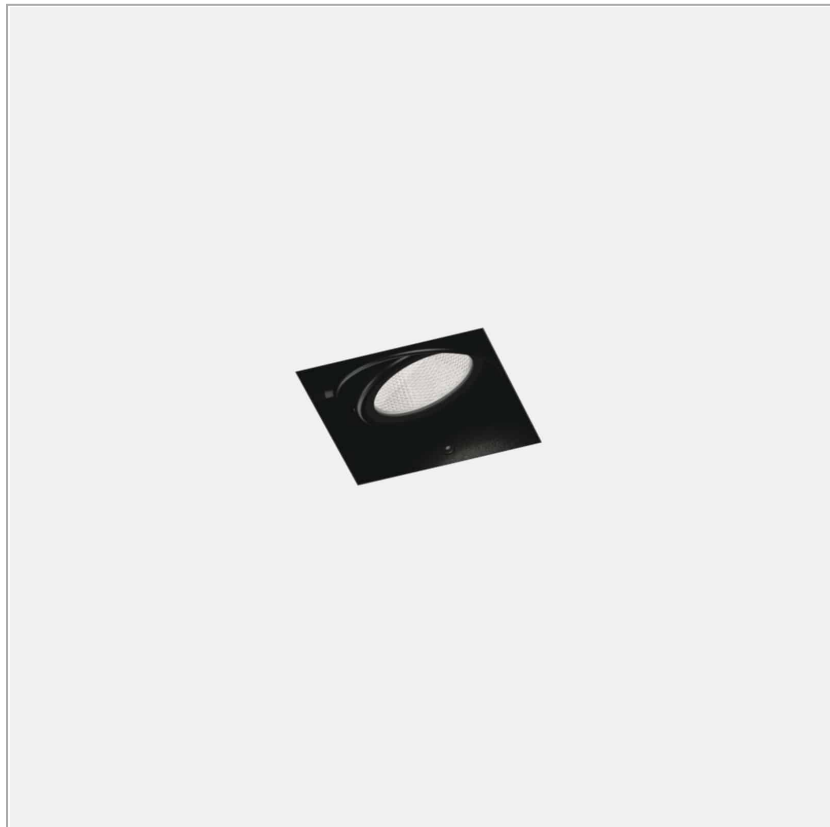

PRODUCT DESCRIPTION

Family of adjustable recessed downlight, with COB LED source, with or without frame. Square or rectangular painted steel structure with one or more light sources. Cardanic optical assembly with $\pm 25^\circ$ orientation on the two horizontal axes. The frameless version necessarily requires a subframe for installation on 13mm plasterboard false ceilings. Equipped with high-performance LEDs, with CRI> 90, high-performance passive heatsink in black anodized extruded aluminum and 99.99% pure aluminum metallized reflector. To be associated with remote stabilized current drivers. IP20.

PRODUCT SPECS

Installation method	Trimless recessed
Light source	Led
Absorbed power	17 W / 24,3 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Spot 15°
Finishing	White
Luminaire luminous flux	1699 lm / 2250 lm
Luminous efficiency	100 lm/W / 93 lm/W
MacAdam color tolerance	>3 / 3
Durata media stimata	3SDCM 50000h L90 B10 ta 25°C
Protocol	On/Off
Energy efficiency class	D / E
Dimension	L159Wx154Hx140 mm
Hole size	squared cut vedi accessori mm
IP Grade	IP20
Protection Class	Class III appliance
Product Spec	Adjustable

ASSEMBLY INSTRUCTIONS



WEB PAGE



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.


Luminous flux and power data are initially subject to tolerances $\pm 10\%$. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 3

MANDATORY ACCESSORIES

Accessori Wallbox Frame Incas 1AM



code TEIN01M

Inspectable frame to be fit plaster in plasterboard 15mm thick for the article INCAS 1M, INCAS 1AM.
For plasterboard 13 mm tick it is necessary thicken.

Technical Sheet



