
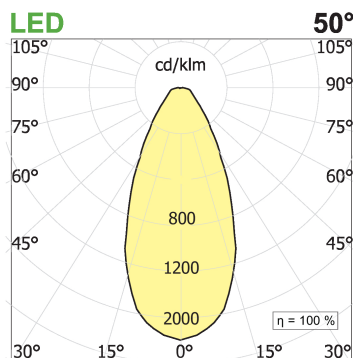


Leva Quadra Wall/ceiling Q9 adjustable

code LV333.940W/01

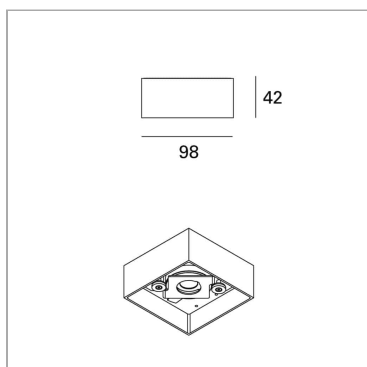

PRODUCT DESCRIPTION

Collection of indoor and outdoor luminaires with integrated LED sources. Possibility of recessed mounting, with base, ceiling or with magnet. Luminaire body in extruded painted aluminum. Anti-glare optics complete with LED chip on board (CRI>90) and lenses. Spot, flood, wideflood optics. Availability of accessories such as snooter and pyramidal covers. Complete with remote electronic power supplies.

PRODUCT SPECS

Installation method	Wall surface mounted, Ceiling surface mounted
Light source	LED
Absorbed power	9x2,2 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Wide 50°
Finishing	White box - black optic
Luminous flux of the product	1525 lm
Luminous efficiency	77 lm/W
MacAdam color tolerance	2
Life time estimate	50000h Ta 25° L90B10
Protocol	On/Off
Energy efficiency class	E
Weight	0.90 Kg
Dimension	L98xW98xH43 mm
IP Grade	IP20
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE



ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.
We reserve the right to make changes to our products at any time.

Page 1 / 1