
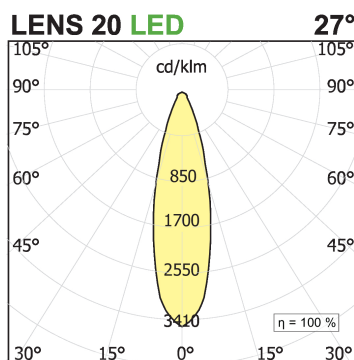
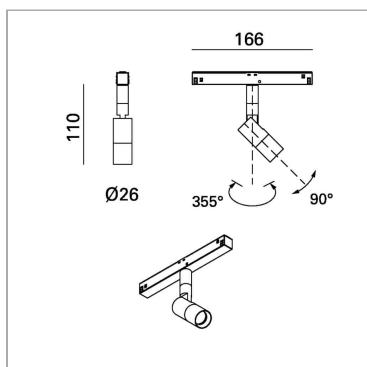


## Focus Mini Track T26 trimless back recessed

code FS501A.940FD/01



### PRODUCT DESCRIPTION

Cylindrical projector in extruded aluminum for installation on Mini Track System, electrified track in very low voltage; installation and positioning by means of quick-coupling insertion tools free; adjustable on the vertical axis of 355 and on the horizontal axis of +/- 90; powder coating or galvanic treatment; with COB (Chip on Board) technology for maximum efficiency; absence of multiple shadows; energy efficient LEDs with high color rendering; on-board electronic converter with Dali2 DT8 2-channel protocol; rear optical group; secondary lens in high transparency pmma; optical units available as accessories with replacement without tools; hot plug protection and power supply without respect for polarity; available accessories such as honey comb, elipsoid lens, asymmetric lens, satined lens. Color finish white.

### PRODUCT SPECS

|                              |                                 |
|------------------------------|---------------------------------|
| Installation method          | Track                           |
| Light source                 | LED                             |
| Absorbed power               | 5,7 W                           |
| Color temperature            | 4000K                           |
| Color rendering index CRI    | >90                             |
| Optic                        | Flood 27°                       |
| Finishing                    | White                           |
| Luminous flux of the product | 580 lm                          |
| Luminous efficiency          | 102 lm/W                        |
| MacAdam color tolerance      | 3                               |
| Life time estimate           | 3SDCM 50000h L90 B10<br>Ta 25°C |
| Protocol                     | Dimmable Dali                   |
| Energy efficiency class      | E                               |
| Dimension                    | W166 Ø26 mm                     |
| IP Grade                     | IP20                            |
| Power supply/Transformer     | Not included                    |
| Protocol                     | See power supply                |

### WEB PAGE



### ASSEMBLY INSTRUCTIONS



Complies with EN605981 and related notes. In the absence of metric symbols, the measurements are all in millimetres.

Luminous flux and power data are initially subject to tolerances +/- 10%. The values refer to an ambient temperature of 25°C unless otherwise specified.

We reserve the right to make changes to our products at any time.

Page 1 / 1