
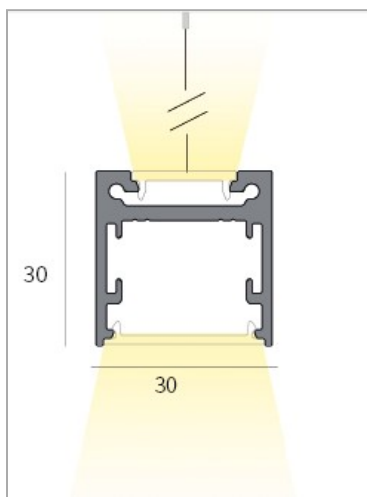


File 30 Suspension double emission

code F3041.840P/01

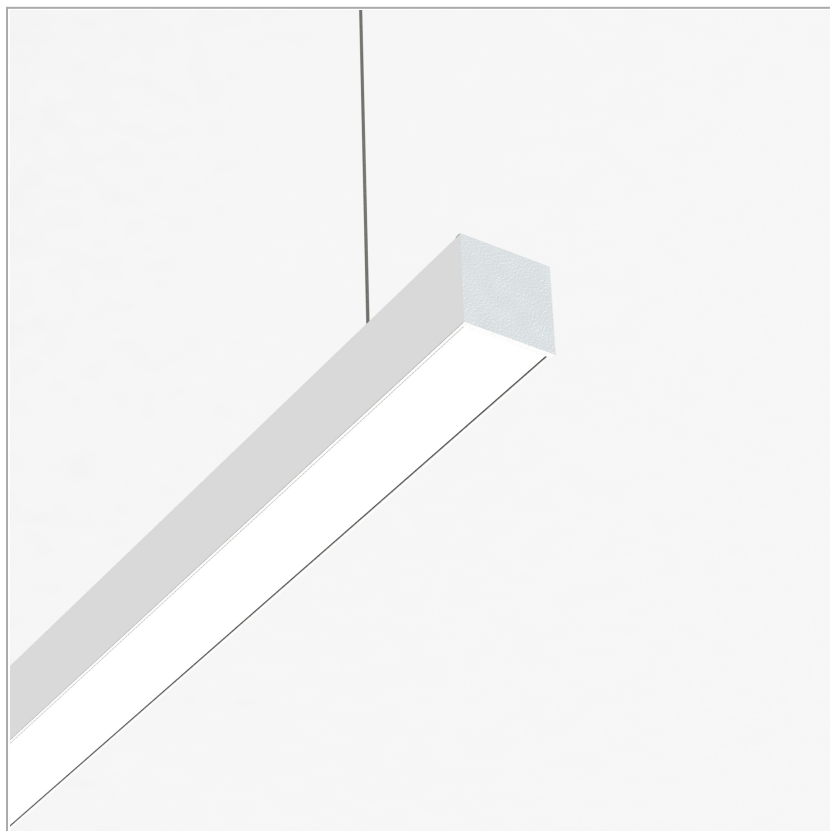

PRODUCT DESCRIPTION

Lamp with direct and indirect light from indoor suspension, extruded aluminum profile 30x30mm, color rendering index CRI>80. Epoxy powder coating, colour finish white. Product complete with end and side cast caps in the same finish. Degree of protection IP20. Requires remote system for electronic power supply.

PRODUCT SPECS

Installation method	Suspension
Light source	Linea Led
Absorbed power	21 W / 9 W
Color temperature	4000K
Color rendering index CRI	>90
Optic	Opal polycarbonate diffuser
Finishing	White
Luminous flux of the product	2124 lm / 485 lm
Luminous efficiency	101 lm/W / 53,88 lm/W
MacAdam color tolerance	3
Energy efficiency class	D
Weight	0.70 Kg
Dimension	L964 mm
IP Grade	IP40
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

WEB PAGE



ASSEMBLY INSTRUCTIONS



OPTIONAL ACCESSORIES

Microfile System Ower cable (L.2000mm) kit with ceiling canopy DRIVER INCLUDED



code MFH00SA/01

system indoor item. Bianco finishing item

Technical Sheet



code MFH00SB/01

system indoor item. Bianco finishing item

Technical Sheet

