


File 30 Suspension double emission

code F3043.827P/01

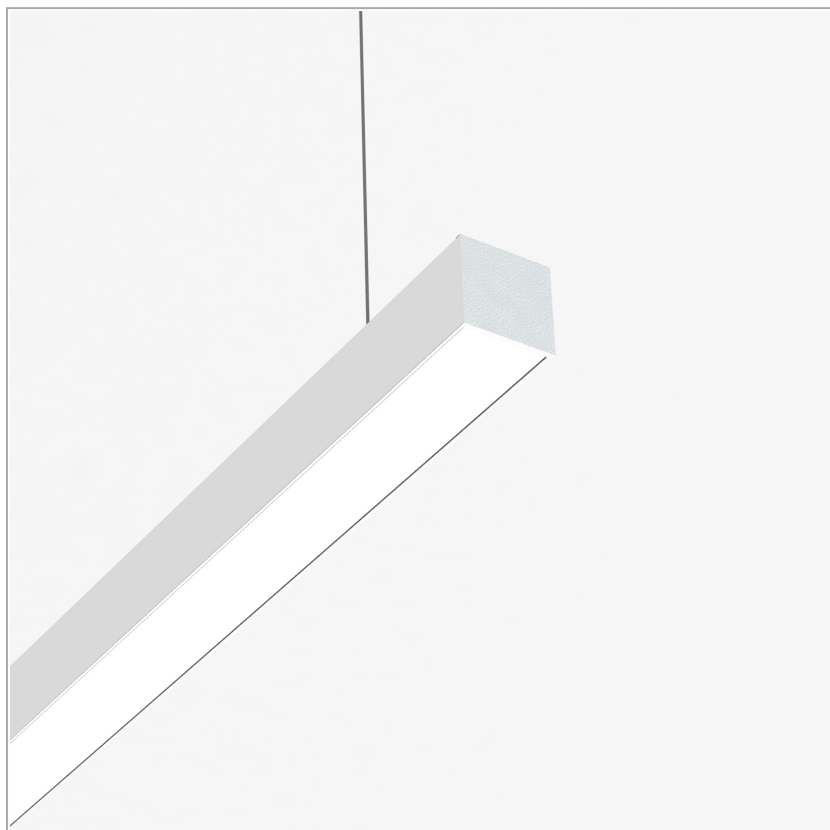


PRODUCT DESCRIPTION

Lamp with direct and indirect light from indoor suspension, extruded aluminum profile 30x30mm, color rendering index CRI>80. Epoxy powder coating, colour finish white. Product complete with end and side cast caps in the same finish. Degree of protection IP20. Requires remote system for electronic power supply.

PRODUCT SPECS

Installation method	Suspension
Light source	Linea Led
Absorbed power	34,3 W / 16,8 W
Color temperature	2700K
Color rendering index CRI	>90 / >80
Optic	Opal polycarbonate diffuser
Finishing	White
Luminous flux of the product	3249 lm / 844 lm
Luminous efficiency	95 lm/W / 50.23 lm/W
MacAdam color tolerance	3
Weight	1.10 Kg
Dimension	L1564 mm
IP Grade	IP40
Protection Class	Class III appliance
Power supply/Transformer	Not included
Protocol	See power supply

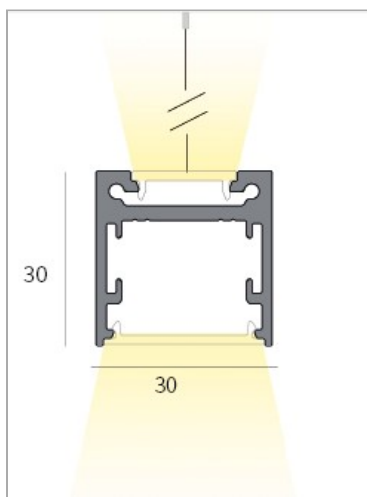

WEB PAGE



ASSEMBLY INSTRUCTIONS



OPTIONAL ACCESSORIES

Microfile System Ower cable (L.2000mm) kit with ceiling canopy DRIVER INCLUDED



code MFH00SA/01

system indoor item. Bianco finishing item

Technical Sheet



code MFH00SB/01

system indoor item. Bianco finishing item

Technical Sheet

